
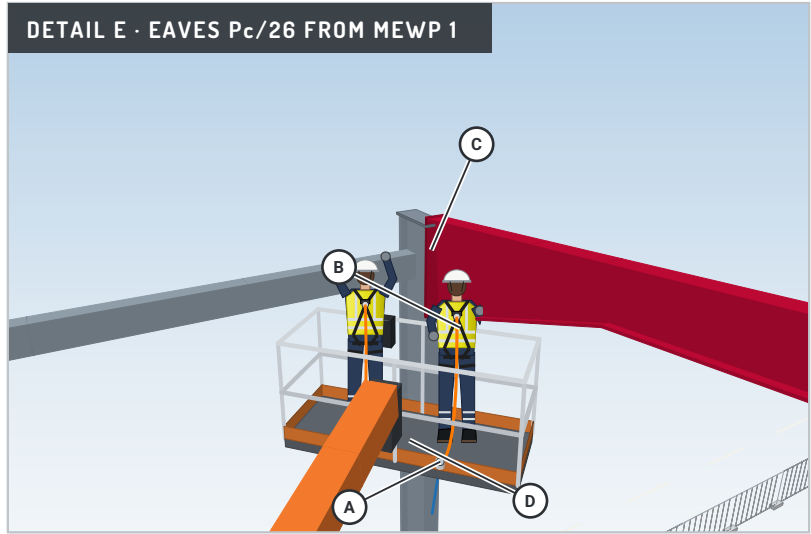


THE STEEL GOING UP — ONE BAY AT A TIME

3-D view from the north-west, built from the project GA geometry · stage 4 of 5: rafter Pb-Pc/26 on the hook

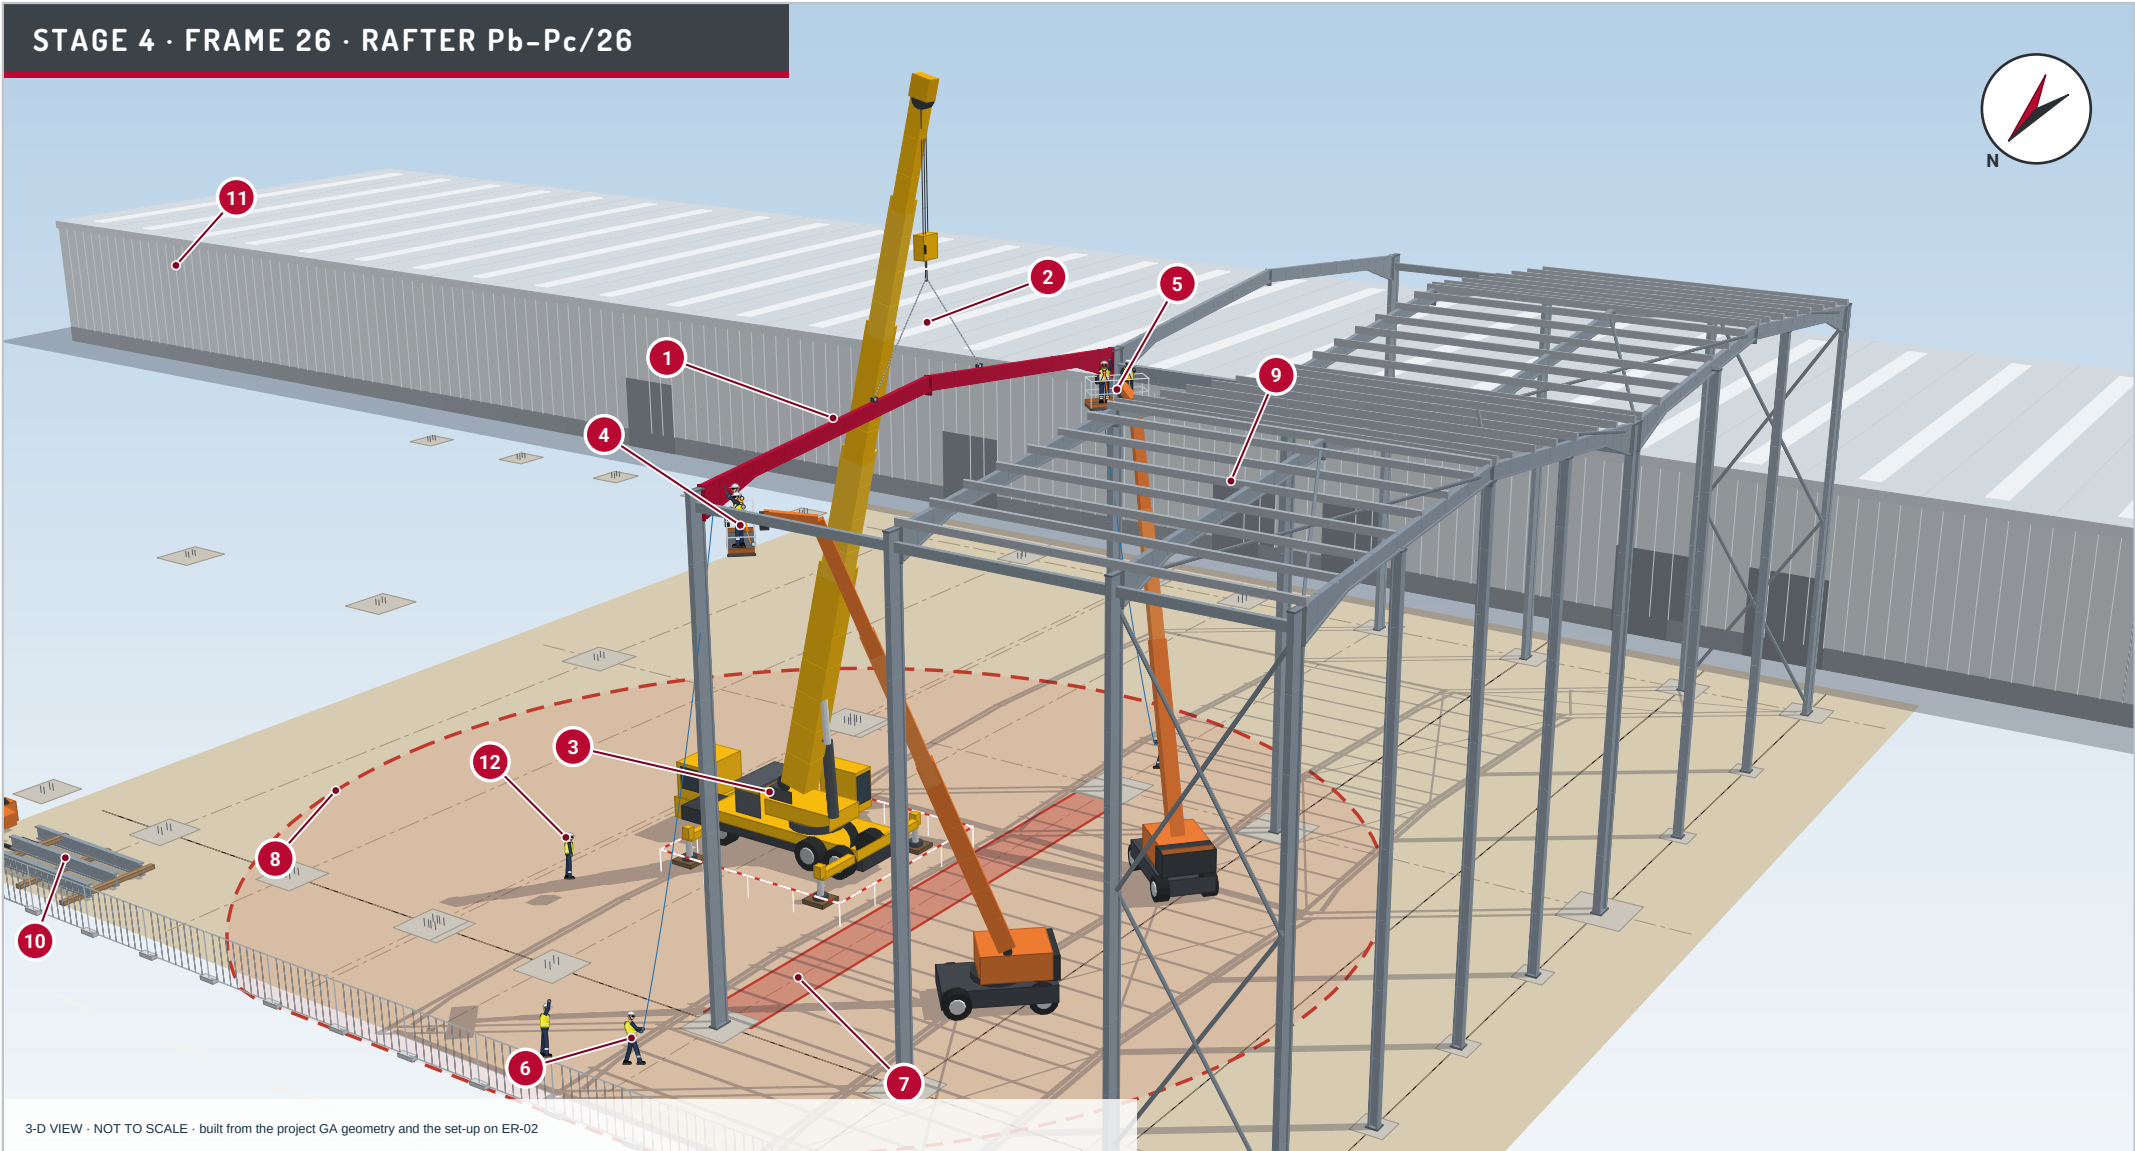




- A Restraint lanyard, dorsal D-ring to the platform anchor
B Full body harness, EN 361 · hard hat with chin strap
C End plate entering the column flange; podger, then bolts
D Platform: 2 persons + tools inside its rated load

FULL PPE FOR EVERYONE IN THE ZONE



KEY TO THE 3-D VIEW

- 1 Rafter Pb-Pc/26 on the hook
3,501 kg, UB533 pair, landed 60 mm above its seats
- 2 Kit C
13 mm grade 8 two-leg, 5.0 m legs, bow shackles to lifting brackets: 58.7%
- 3 Grove GMK3055 (55 t)
slew 6.0 m east of grid 26, checked at 7.0 m: 26.0% of duty
- 4 MEWP 1 at the eaves Pc/26
two erectors, harness and restraint lanyard each
- 5 MEWP 2 at the valley Pb/26
two erectors; platforms clear of the load's path
- 6 Tag lines, N and S ends
held from outside the span, never wrapped on a hand
- 7 Drop zone beneath the load
nobody inside it while the rafter is airborne
- 8 Lifting zone R 23 m
stops at the Heras line; supervisor controls entry
- 9 Frames 23-25 complete
braced bay 23-24, valley beams, eaves ties, purlins
- 10 Next: grids 27-28
pads and HD bolts ready; laydown east, outside the zone
- 11 Existing building
occupied: no load slewed towards it or the live road
- 12 Lift supervisor (CPCS A62)
slinger-signaller (A40) at the north tag line

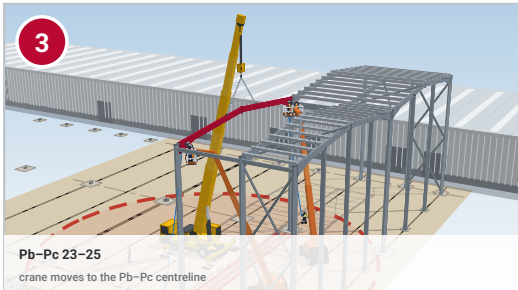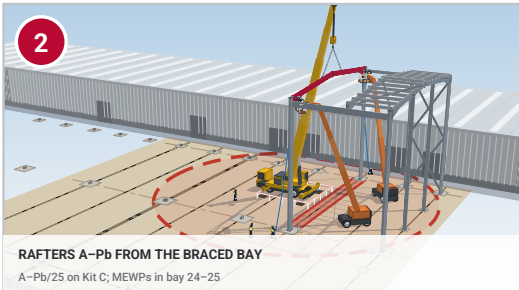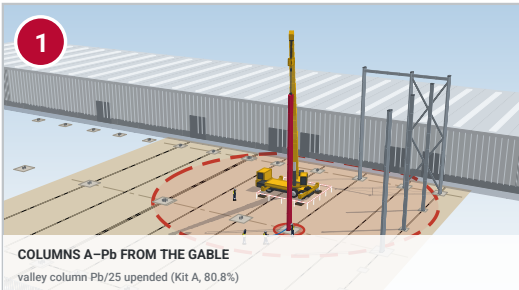

Ricky Marsh | CPCS A61 Appointed Person
07803 808093 | ricky@rmtsolutions.co.uk
www.rmtsafety solutions.com
EXAMPLE ONLY - NOT FOR USE ON SITE

NOTES

Built from project GA S-0001 to S-0008 and the set-up on ER-02. Not to scale; do not measure.
Stage 4 is the moment of ER-02 to ER-04: rafter Pb-Pc/26, 3,501 kg on Kit C, landing.
Erectors work only from MEWP platforms, in full body harnesses on short restraint lanyards to the platform anchors: restraint, never fall arrest. Two persons per platform.
Nobody beneath the load or in the drop zone; tag lines held from outside the span.
Telehandler (RMT-LP-2026-232) stays out of the lifting zone while the crane is lifting.

PUBLIC WEBSITE COPY - EXAMPLE ONLY - NOT FOR USE ON SITE


LEGEND

- Member on the hook
Steel erected (primer grey)
Grove GMK3055 (55 t)
MEWP, 26 m platform class
Lifting zone R 23 m and drop zone


MACHINE	Grove GMK3055 (55 t) · alternatives 60 / 50 / 40 t
DUTY	Steel erection by mobile crane · BS 7121-1 / -3 · MEWPs to BS EN 280
PROJECT	Anonymised structural steel erection example
DRAWING No.	RMT-LP-2026-235/ER-05
SCALE / SIZE	3-D views, not to scale @ A3
COPY / DATE	Public example - 6 October 2026
PREPARED BY	RMT Solutions Ltd - website example

CROSS-SECTION – RAFTER Pb-Pc ON THE HOOK AT GRID 26


Section A-A in bay 25-26, looking east · scale 1:200 · Grove GMK3055 on 29.6 m main boom

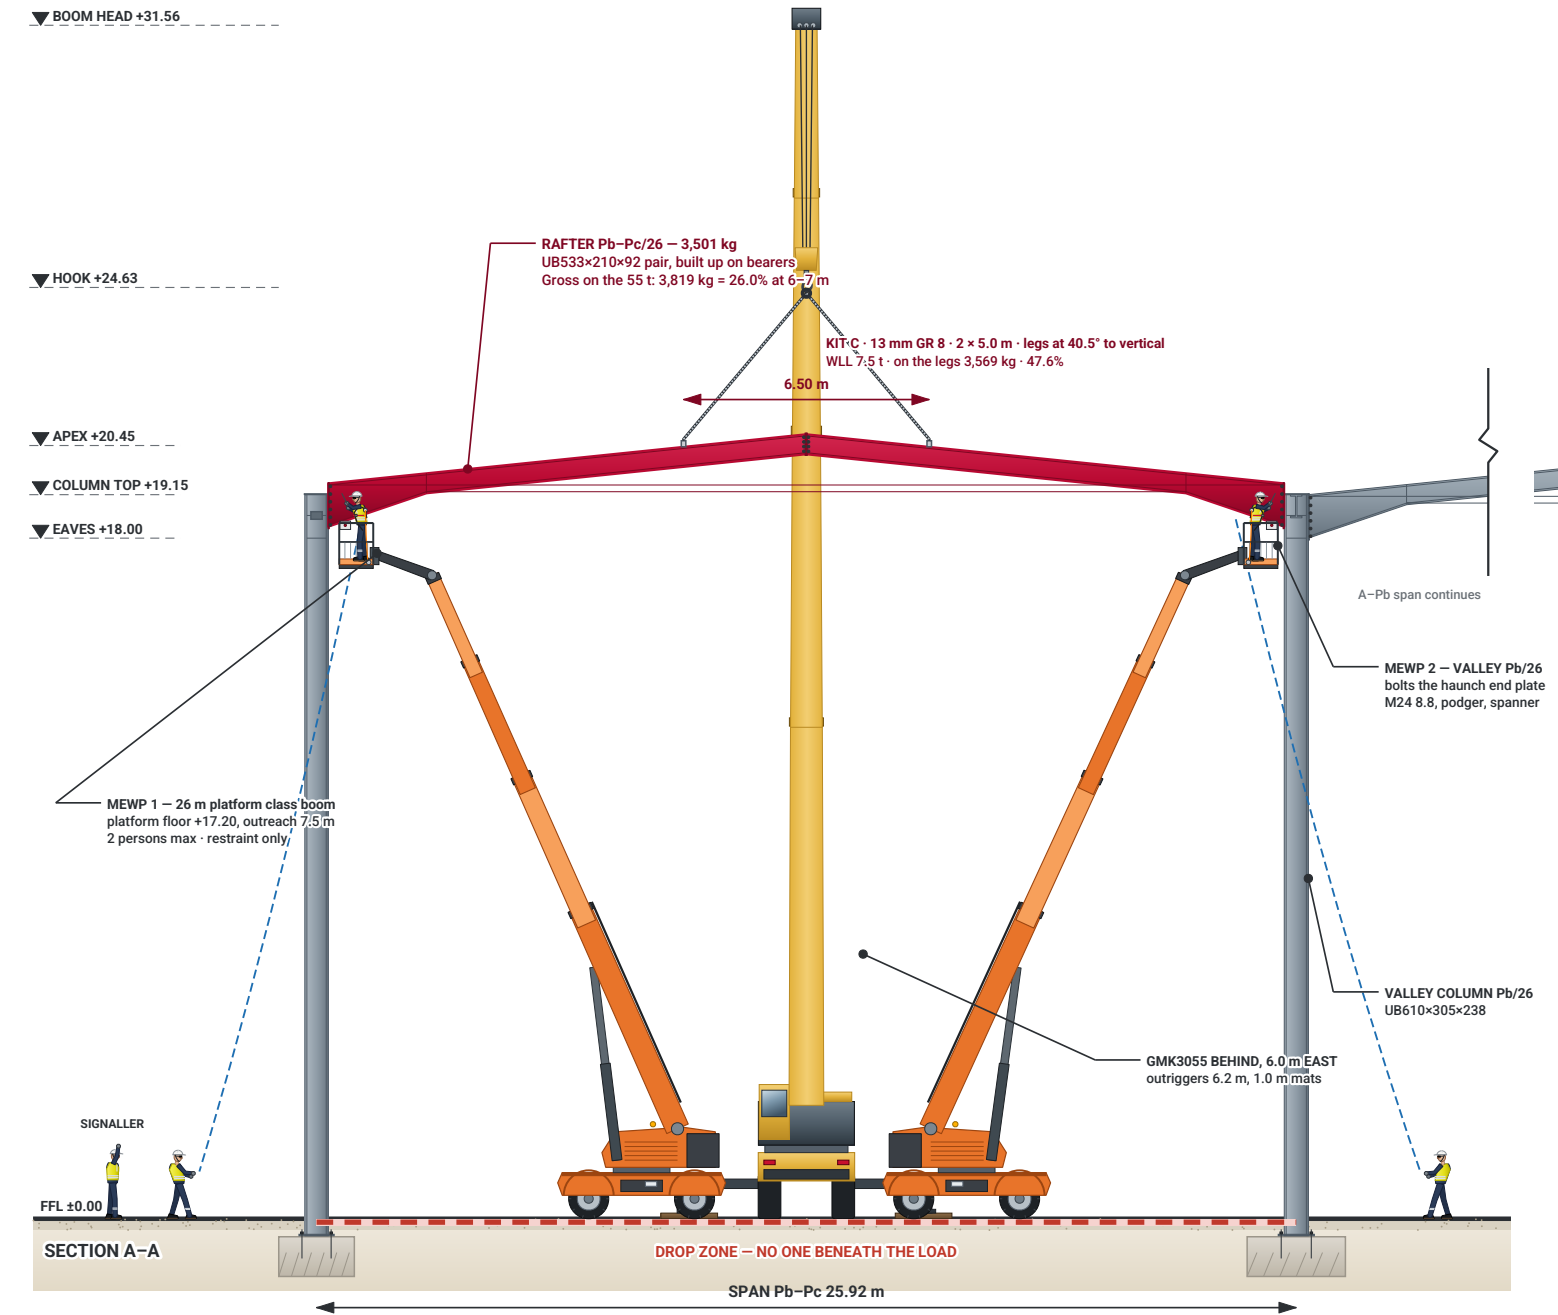

DETAIL C – CONNECTING AT THE VALLEY COLUMN · 1:25

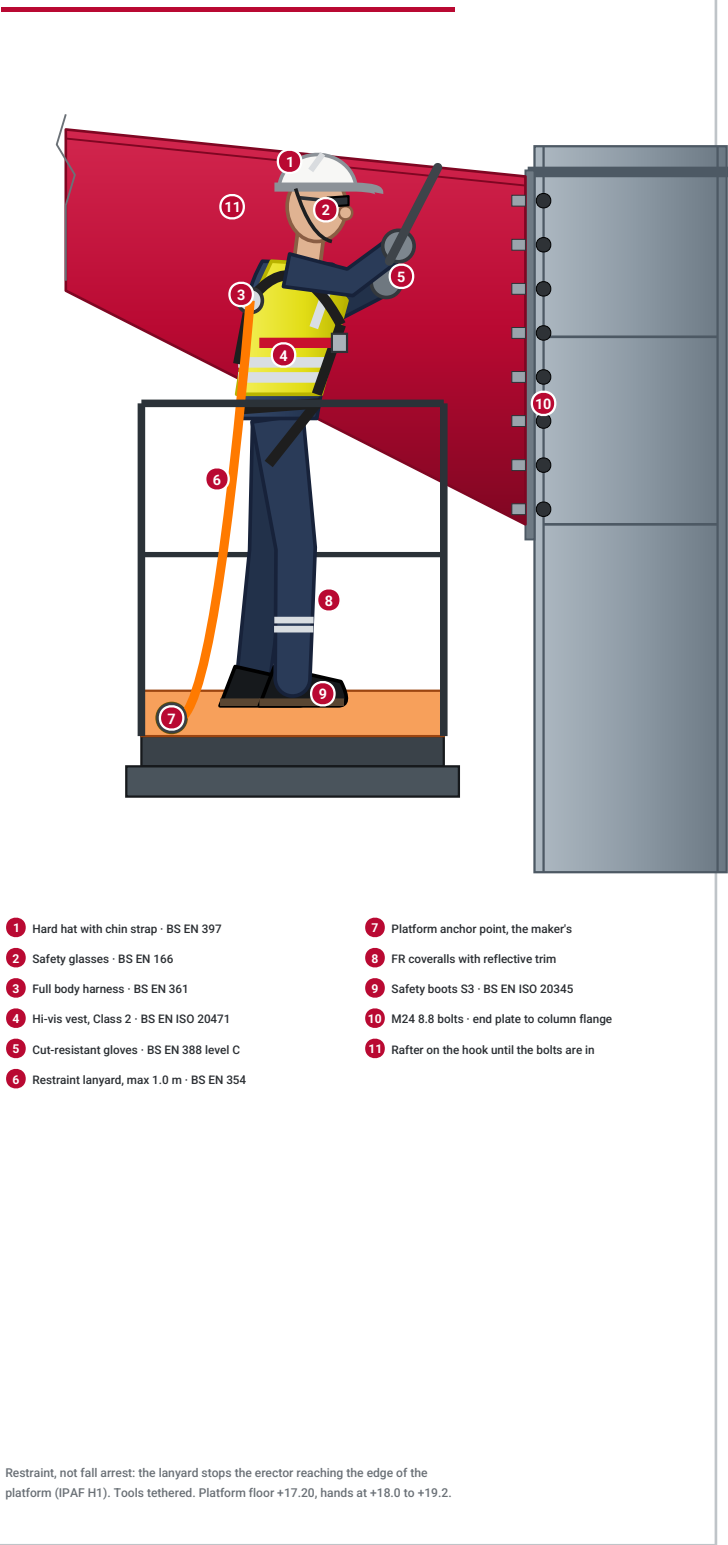

DETAIL D – KIT C LIFTING POINT · 1:10

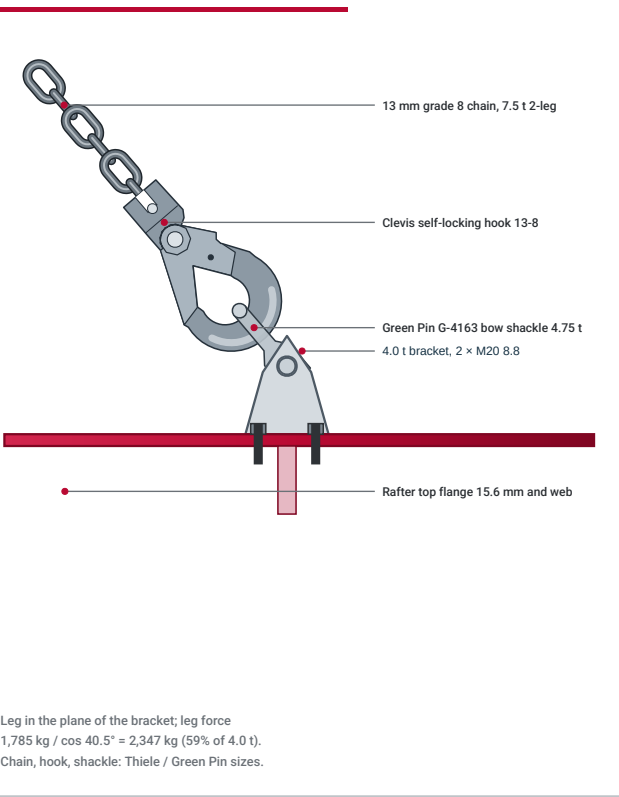

THIS LIFT – L05 BUILT-UP RAFTER

Member (3005 + 3002 + bolts)	3,501 kg
Kit C rigging	68 kg
Hook block (3-fall)	250 kg
Gross on the 55 t	3,819 kg
Duty at 7 m, 29.6 m boom	14,700 kg
Utilisation (ceiling 90%)	26.0%
Hook height / max load height	24.63 / 20.75 m
Boom head (solved)	31.56 m
Permissible gust, 3 s	4.2 m/s



Ricky Marsh | CPCS A61 Appointed Person
07803 808093 | ricky@rmtsolutions.co.uk
www.rmtsafetyolutions.com
EXAMPLE ONLY - NOT FOR USE ON SITE

NOTES

Section taken in bay 25-26 looking east. Frames 23 to 25 complete; frame 26 columns and the A-Pb rafter in.
Rafter Pb-Pc/26 (built up on the ground, 3,501 kg) shown 0.30 m above its landing on Kit C.
The crane stands on the Pb-Pc centreline 6.0 m east of grid 26 (drawn behind the frame).
MEWPs stand in bay 25-26, clear of the load's footprint; erectors connect from the platforms.
No one beneath the load. Tag-line handlers stand outside the span, beyond the drop zone.
Levels relative to FFL. Working platform taken at FFL ±0.00 (TWC to confirm, hold point H2).

PUBLIC WEBSITE COPY - EXAMPLE ONLY - NOT FOR USE ON SITE




LEGEND

- Structural steel, erected
- Member on the hook (Kit C)
- Cut member (valley beam, eaves tie, purlin)
- Tag line (12 mm polyester)
- Restraint lanyard to platform anchor
- Drop zone – no one beneath the load

MACHINE	Grove GMK3055 (55 t) · alternatives 60 / 50 / 40 t
DUTY	Steel erection by mobile crane · BS 7121-1 / -3 · MEWPs to BS EN 280
PROJECT	Anonymised structural steel erection example
DRAWING No.	RMT-LP-2026-235/ER-03
SCALE / SIZE	1:200, details 1:25 and 1:10 @ A3
COPY / DATE	Public example - 6 October 2026
PREPARED BY	RMT Solutions Ltd - website example


KIT C – THE BUILT-UP RAFTER ON TWO LEGS

Elevation 1:50 · rafter shown over its central 9 m · two legs of 13 mm grade 8 chain to 4.0 t brackets

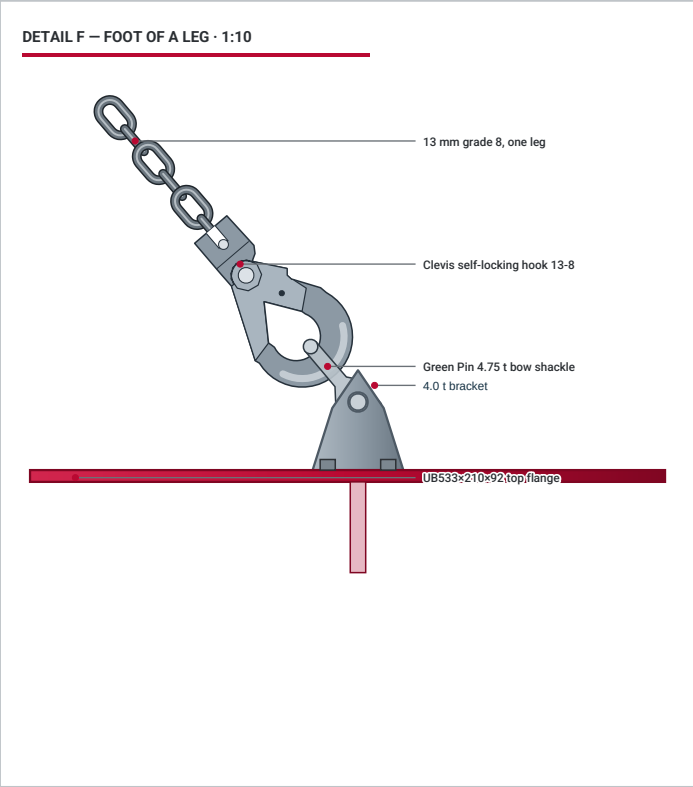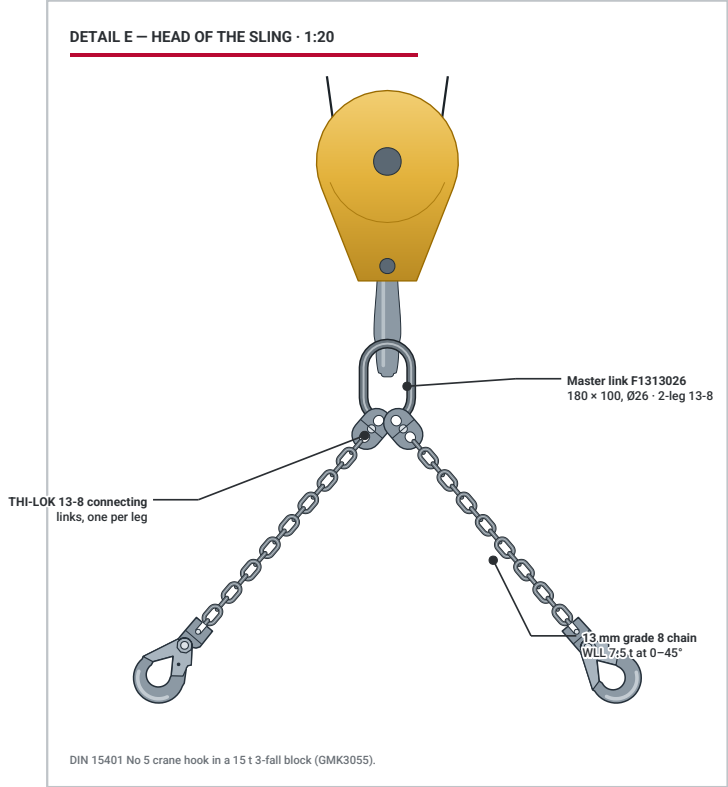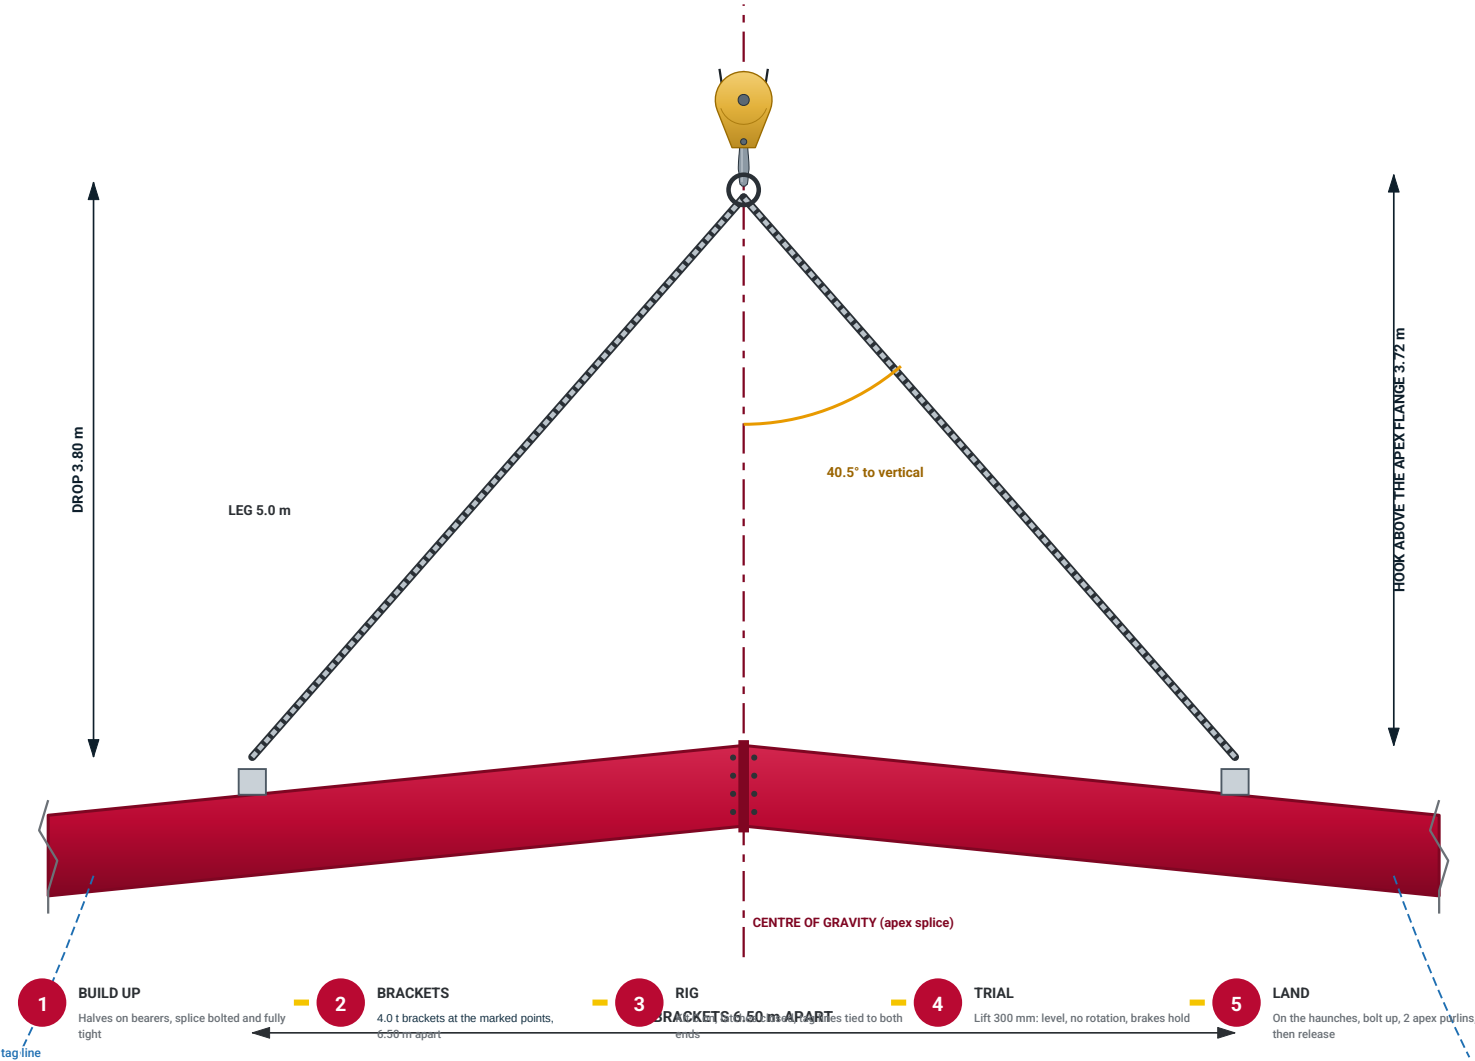

KIT C – COMPONENTS AND CHECKS (3,501 kg)

Item	WLL	Mass
Grade 8 chain sling, 13 mm, two leg, 5.0 m legs, BS EN 818-4	7.5 t	47.8 kg
2 × Green Pin G-4163 bow shackle, bolt type with safety nut and pin, 4.75 t, EN 13889	4.75 t	2.4 kg
2 × certified lifting bracket, 4.0 t, bolted through the top flange or cap plate (2 × M20 8.8)	4 t	15.0 kg
Tag lines, 2 × 16 m × 12 mm polyester (on the load)	–	3.0 kg
Rigging below the hook		68.2 kg
Chain sling		3,569 kg · 48%
Bow shackle		2,348 kg · 49%
certified lifting bracket		2,348 kg · 59%

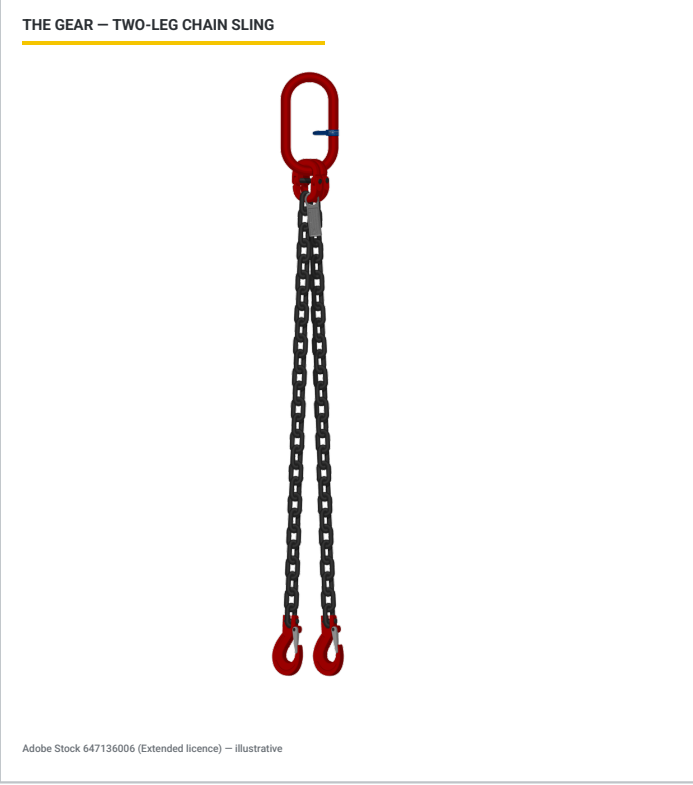

Ricky Marsh | CPCS A61 Appointed Person
07803 808093 | ricky@rmtsolutions.co.uk
www.rmtsafetytsolutions.com
EXAMPLE ONLY - NOT FOR USE ON SITE

NOTES

Rafter halves bolted at the apex on bearers before the lift; splice bolts fully tight first.
Brackets on the top flange 3.25 m either side of the centre of gravity (marked by the steelwork contractor on the steel).
Legs 5.0 m at 40.5° to the vertical: inside the 0–45° band, so the 2-leg tag WLL of 7.5 t applies.
Brackets and shackles take the true leg force (1,785 kg / cos 40.5° = 2,347 kg each).
Lift 300 mm and check the rafter hangs level and does not rotate before it goes up.
Two purlins at the apex bolted in from the MEWPs before the hook is released (project RAMS).

PUBLIC WEBSITE COPY - EXAMPLE ONLY - NOT FOR USE ON SITE

LEGEND

- Chain and fittings (grade 8)
- Rafter on the hook
- Tag line
- Centre of gravity

MACHINE	Grove GMK3055 (55 t) · alternatives 60 / 50 / 40 t
DUTY	Steel erection by mobile crane · BS 7121-1 / -3 · MEWPs to BS EN 280
PROJECT	Anonymised structural steel erection example
DRAWING No.	RMT-LP-2026-235/RG-02
SCALE / SIZE	1:50, details 1:20 and 1:10 @ A3
COPY / DATE	Public example - 6 October 2026
PREPARED BY	RMT Solutions Ltd - website example