


ELEVATION A-A

OFFLOADING SUBSTATION 2 (1000 kVA) ONTO PLINTH P2 – LIFT L1, GOVERNING

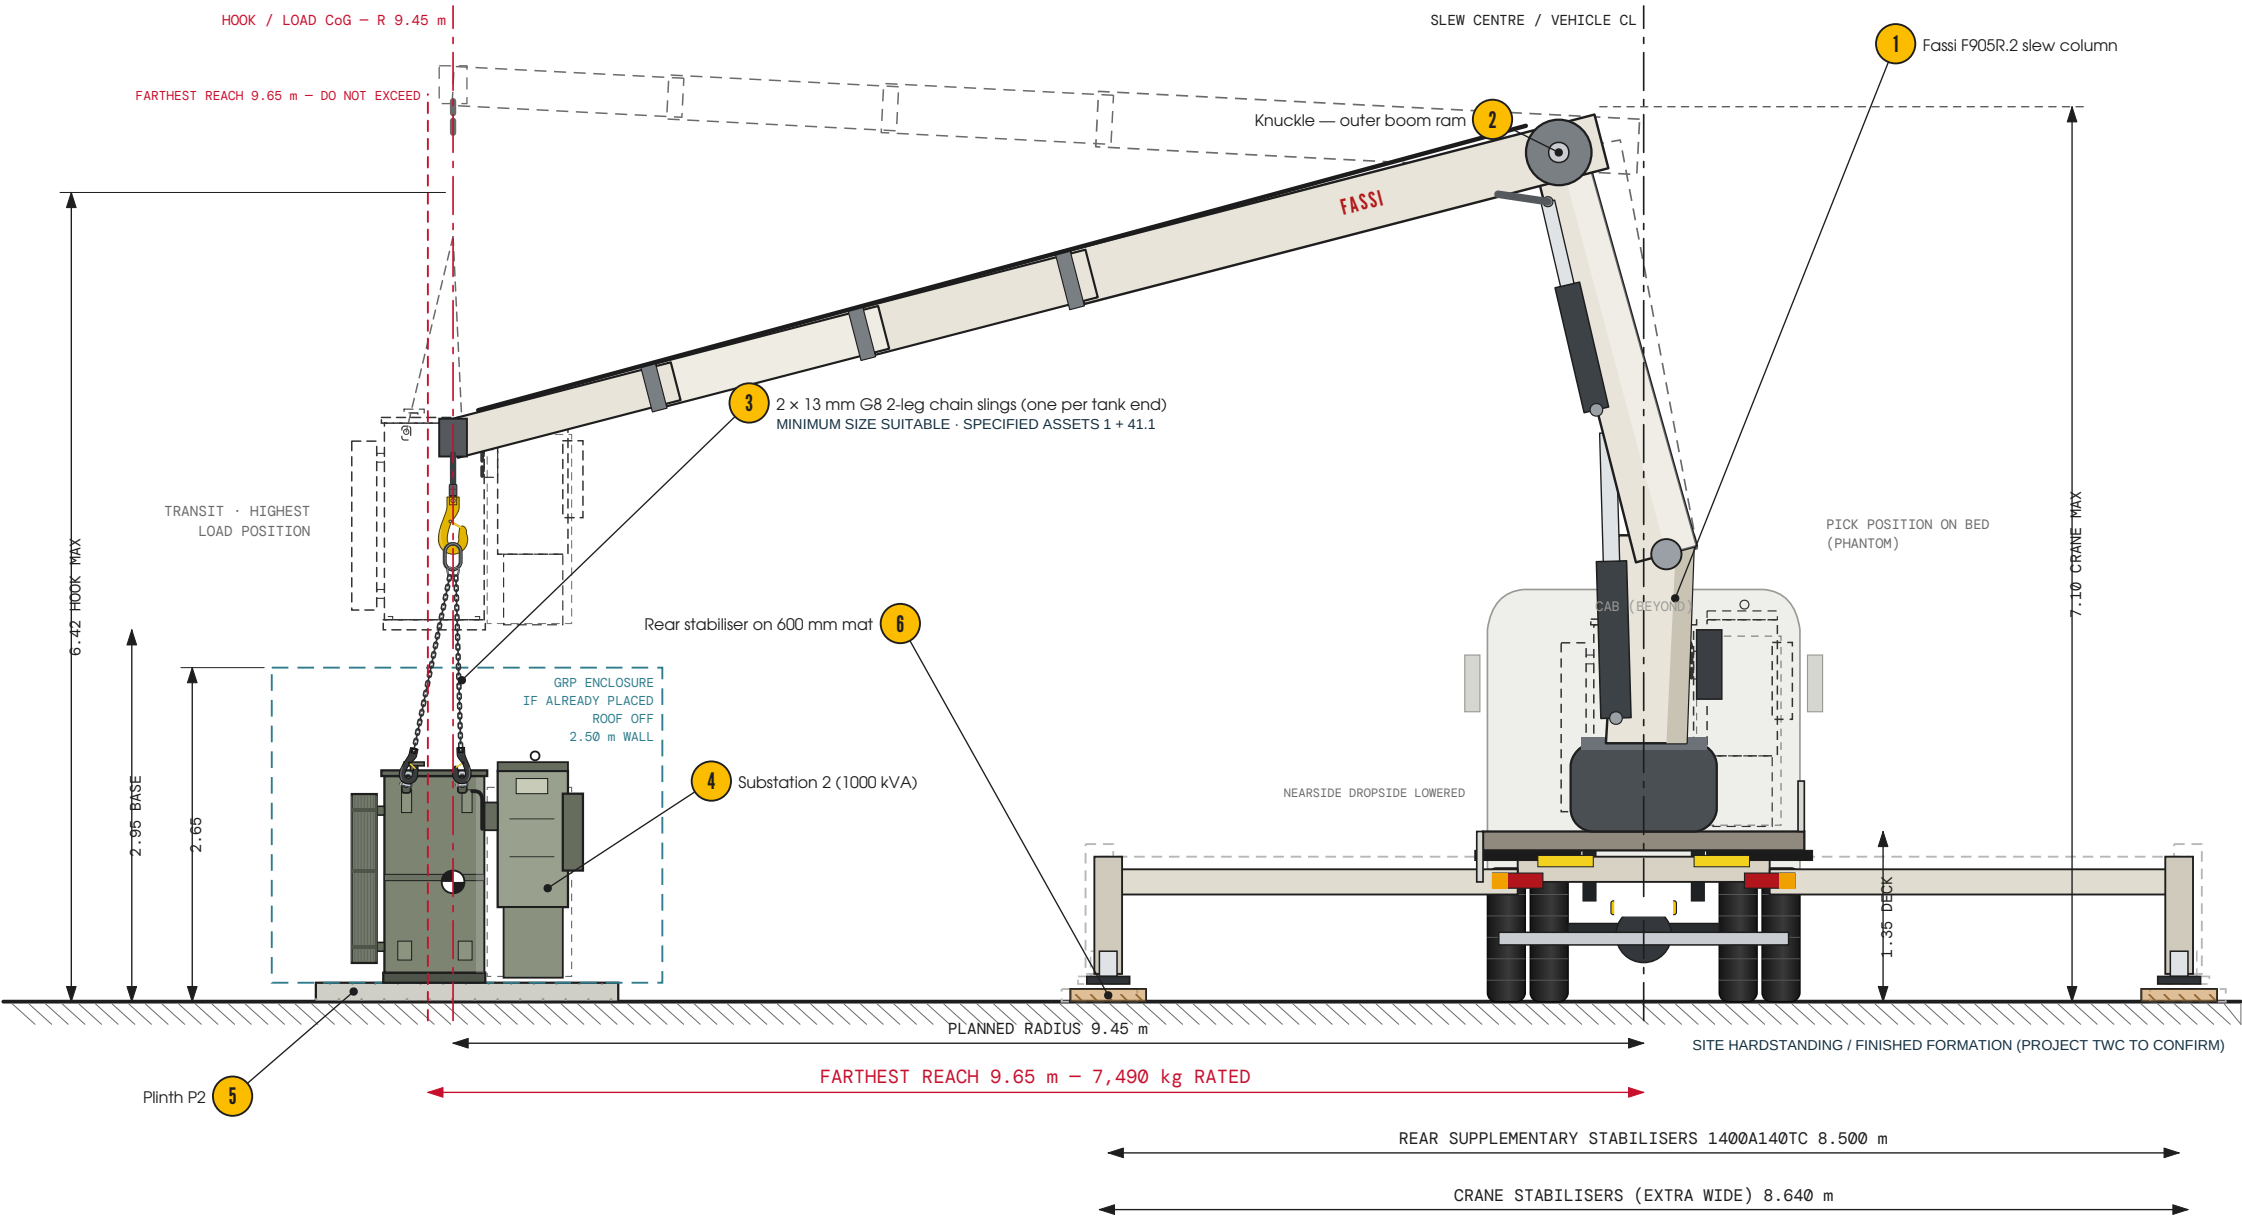

LIFT SEQUENCE – L1: SUBSTATION 2 TO P2, THEN L2: SUBSTATION 1 TO P1 (SEE PL-01)

**01 PICK**  
Hook over CoG. Raise 100-300 mm and HOLD for the trial lift: level, legs share, LMI reading.

**02 RAISE**  
Raise until the base clears the bed / enclosure wall by 300 mm (base 2.95 m).

**03 SLEW + BOOM OUT**  
Slew to the nearside at creep speed, booming out to 9.45 m, never past 9.65 m. Tag lines from outside the load path.

**04 LAND**  
Lower vertically onto P2. Seat fully, check level, then slacken and release hooks from the ground.



TRANSFORMER INSTALLATION

Fassi F905R.2 | Public drawing example

ELEVATION A-A  
OFFLOAD TO PLINTH P2  
PLANNED 9.45 m · LIMIT 9.65 m

|                         |                                  |
|-------------------------|----------------------------------|
| LIFTING APPLIANCE       | Fassi F905R.2 FSC Techno         |
| VEHICLE                 | Anonymous installation vehicle   |
| LOAD (GOVERNING)        | Substation 2 · 1000 kVA          |
| TOTAL LIFT WEIGHT       | 5,324 kg                         |
| RADIUS / CAPACITY       | 9.45 m (limit 9.65) / 7,490 kg   |
| UTILISATION             | 71.1% of rated · ceiling 80%     |
| RIGGING (MINIMUM)       | 2 × 13 mm G8 2-leg · 4.75 t bows |
| MAX HOOK / CRANE HEIGHT | 6.42 m / 7.10 m                  |

|           |                             |
|-----------|-----------------------------|
| LEGEND    |                             |
| —         | Solid — landing position    |
| - - -     | Phantom — pick / transit    |
| - · - · - | Centre line / slew axis     |
| ▨         | Stabiliser mat 600 x 600 mm |

- NOTES
1. Viewed from the rear of the vehicle looking forward; crane slewed 90° to the nearside. Offside to the right.
  2. Farthest reach for both units is 9.65 m (CCT report 03201 rated position). 11.70 m gives 87.8% (L1) and 84.2% (L2) — over the project's 80%, NOT PERMITTED. Planned hook radius 9.45 m leaves 0.20 m positioning margin.
  3. All four stabilisers fully extended (8.64 m crane / 8.50 m rear supplementary, 100% on the outrigger monitor) on 600 x 600 mm rated mats. Ground ≥ 1.050 kN/m² (ALLMI worst case 1.016 kN/m²) confirmed by project TWC (hold point H2).
  4. Boom member lengths and the vehicle body are a drawing convention · no installation vehicle dimension sheet was supplied (H1). Radius and heights are solved from the plan.
  5. Phantom: load on the vehicle bed (pick) and in transit at its highest point, clearing a pre-placed GRP enclosure wall by 300 mm.
  6. Load lands level on the plinth; slings are slackened only when the unit is fully seated.

RMT SOLUTIONS LTD

Ricky Marsh | CPCS A61 Appointed Person  
07803 808093  
ricky@rmtsolutions.co.uk  
www.rmtsafety solutions.com


EXAMPLE ONLY - NOT FOR USE ON SITE

PUBLIC COPY | EL-01 | 6 October 2026

PLAN

VEHICLE AT THE STANDING · LIFTS L1 AND L2

SCALE 1:125 @ A3



INDICATIVE

SERVICES

No overhead line within the slew envelope + GS6 clearance. Standing and mats clear of buried services (CAT scan + drawings) — hold point H3.



THE COMPLETE LIFT PLAN COMPANY

TRANSFORMER INSTALLATION

Fassi F905R.2 | Public drawing example

DRAWING

PLAN  
VEHICLE STANDING, DUTY  
RINGS & EXCLUSION ZONE

|                         |                                   |
|-------------------------|-----------------------------------|
| SLEW CENTRE TO FRONT    | 3.30 m (crane behind cab) · H1    |
| STABILISER SPREAD       | 8.64 m crane · 8.50 m rear        |
| STABILISER LONGITUDINAL | 6.95 m (rear 6.50 m aft) · H1     |
| FARTHEST REACH          | 9.65 m limit · planned 9.45 m     |
| L1 · SUB 2 TO P2        | 5,324 kg · 71.1%                  |
| L2 · SUB 1 TO P1        | 5,104 kg · 68.1%                  |
| EXCLUSION ZONE          | 13.5 m radius, rigid barrier      |
| WORST STABILISER LOAD   | 365.6 kN · 1,016 kN/m² on 600 mat |

LEGEND

- Farthest reach 9.65 m
- Duty ring not permitted
- Exclusion zone barrier
- Slew path of load
- Personnel position

NOTES

- Plinth positions are indicative until the project team setting-out is issued (hold point H5). The unit CoG (hook) is planned at 9.45 m and must land inside the 9.65 m ring. CoG = tank centre offset 149–156 mm toward the HV/LV cabinets; a plinth centre within 9.45 m satisfies this in any orientation.
- Do not lift beyond the 9.65 m ring. At 11.70 m the CCT rated capacity is 6,065 kg: L1 87.8%, L2 84.2% against the project's 80% ceiling. Reposition the vehicle instead.
- L1 is lifted first (front unit), so L2 never passes over a landed unit. Slew at creep speed; no load over the cab.
- Exclusion zone: rigid barriers and signage at 13.5 m from the slew centre. Only the operator, lift supervisor and slinger/signaller enter. Traffic stopped at the barrier.
- Vehicle outline indicative (no installation vehicle dimension sheet supplied); stabiliser spreads from CCT report 03201. North point indicative. Overhead lines: none within the slew envelope plus GS6 clearance (hold point H3).

RMT SOLUTIONS LTD

Ricky Marsh | CPCS A61 Appointed Person

07803 808093

ricky@rmtsolutions.co.uk

www.rmtsafetytsolutions.com

EXAMPLE ONLY - NOT FOR USE ON SITE


PUBLIC COPY | PL-01 | 6 October 2026

| LIFT | LOAD                    | GROSS    | PICK R | SET R  | CAPACITY | UTIL  | SLING | SHACKLE | PLINTH |
|------|-------------------------|----------|--------|--------|----------|-------|-------|---------|--------|
| L1   | Substation 2 — 1000 kVA | 5,324 kg | 3.40 m | 9.45 m | 7,490 kg | 71.1% | 65.9% | 57.2%   | P2     |
| L2   | Substation 1 — 800 kVA  | 5,104 kg | 5.90 m | 9.45 m | 7,490 kg | 68.1% | 63.0% | 54.6%   | P1     |

Total lift weight per ALLMI: (declared load + 55 kg accessories + 300 kg boom-tip attachment allowance) x 1.10; hook included in CCT rated capacities. Ceiling 80% (project limit, stricter than RMT 90%); accessories 100% WLL.

RIGGING ARRANGEMENT

SUBSTATION 2 · 1000 kVA · GOVERNING LOAD — SAME TACKLE FOR SUBSTATION 1



MINIMUM SIZE  
SUITABLE – SELECTED

|                       |           |                    |      |
|-----------------------|-----------|--------------------|------|
| CHAIN SLINGS (2-LEG)  |           | needs 4,942 kg     |      |
| 2 x 68 13 mm 2-leg    | 7,500 kg  | 65.9%              | OK   |
| 68 10 mm 4-leg*       | 4,250 kg  | 116.3%             | FAIL |
| BOW SHACKLE (PER LEG) |           | worst leg 2,715 kg |      |
| 4.75 t x 4            | 4,750 kg  | 57.2%              | OK   |
| 2.0 t (D3)            | 2,000 kg  | 135.7%             | FAIL |
| CRANE HOOK            |           | both master links  |      |
| 22 t hook             | 22,000 kg | 22.7%              | OK   |

Selected = smallest certified item in Asset register (inspection provider, examined 01/05/2026, due 01/11/2026) that keeps L1 at or under 100% of WLL. \*10 mm 4-leg (42106, 6.7 t) on a rigid load is rated as two-leg, 4,250 kg; fails. 6.5 t bows: only three held. 2 t bows fail.

|            |       |       |
|------------|-------|-------|
| BOTH UNITS |       |       |
|            | L1    | L2    |
| Sling      | 65.9% | 63.0% |
| Shackle    | 57.2% | 54.6% |
| Single leg | 51.2% | 48.9% |



TRANSFORMER INSTALLATION

Fassi F905R.2 | Public drawing example

RIGGING ARRANGEMENT  
2 x 13 mm G8 TWO-LEG  
MINIMUM SIZE SUITABLE

|                         |                                               |
|-------------------------|-----------------------------------------------|
| SLINGS                  | 2 x G8 13 mm 2-leg · specified gear 1, 41.1   |
| SLING WLL (RATED 2-LEG) | 7,500 kg @ 0–45°                              |
| SHACKLES                | 4 No. 4.75 t alloy bow · 06114, DBF1 x2, DBF3 |
| CRANE HOOK              | 22 t WLL (CCT report 03201)                   |
| LEG ANGLE (TRUE)        | 24.5° to vertical                             |
| HOOK SEAT ABOVE SKID    | 3.47 m                                        |
| GOVERNING SLING LOAD    | 4,942 kg (65.9%)                              |
| GOVERNING LEG / SHACKLE | 2,715 kg (57.2%)                              |

|        |                          |
|--------|--------------------------|
| LEGEND |                          |
|        | Grade 8 chain, 13 mm     |
|        | Detail reference (RG-02) |
|        | Centre of gravity        |


- NOTES
- Lift only on the four transformer tank lifting lugs (GA item 14/15). The two top-cover lugs and the HV RMU lifting eye are for those parts alone — NEVER lift the unit on them.
  - One 13 mm Grade 8 two-leg sling per tank end; both master links seated side by side in the bowl of the 22 t crane hook, latch closed, neither riding the latch or the point.
  - Rigid load on four legs: the pair is rated as ONE two-leg sling, 7,500 kg (BS EN 818-6 / LEEA), i.e. any two legs can carry the whole load. Legs 0–45° to vertical only.
  - CoG sits about 0.15 m toward the HV/LV cabinet side, so with equal legs the unit hangs about 3.2° (3.3° for Substation 1) low on that side. Use shortening clutches if the slings carry them; if not, up to 5° is accepted — check at the trial lift.
  - Shackle pin through the lug eye, bow to the sling hook. Pin secured by type (H1): safety-bolt — nut and split pin fitted; screw-pin — screwed fully home and moused. Lug eye takes the 22 mm pin and the lug plate fits the 31 mm jaw (H4); if not, STOP.
  - Lug centres scaled from the manufacturer GA (1,670 x 445 mm) · confirm on the unit before the lift. Do not scale this drawing for fabrication.

RMT SOLUTIONS LTD

Ricky Marsh | CPCS A61 Appointed Person  
07803 808093  
ricky@rmtsolutions.co.uk  
www.rmtsafetyolutions.com


EXAMPLE ONLY - NOT FOR USE ON SITE

PUBLIC COPY | RG-01 | 6 October 2026

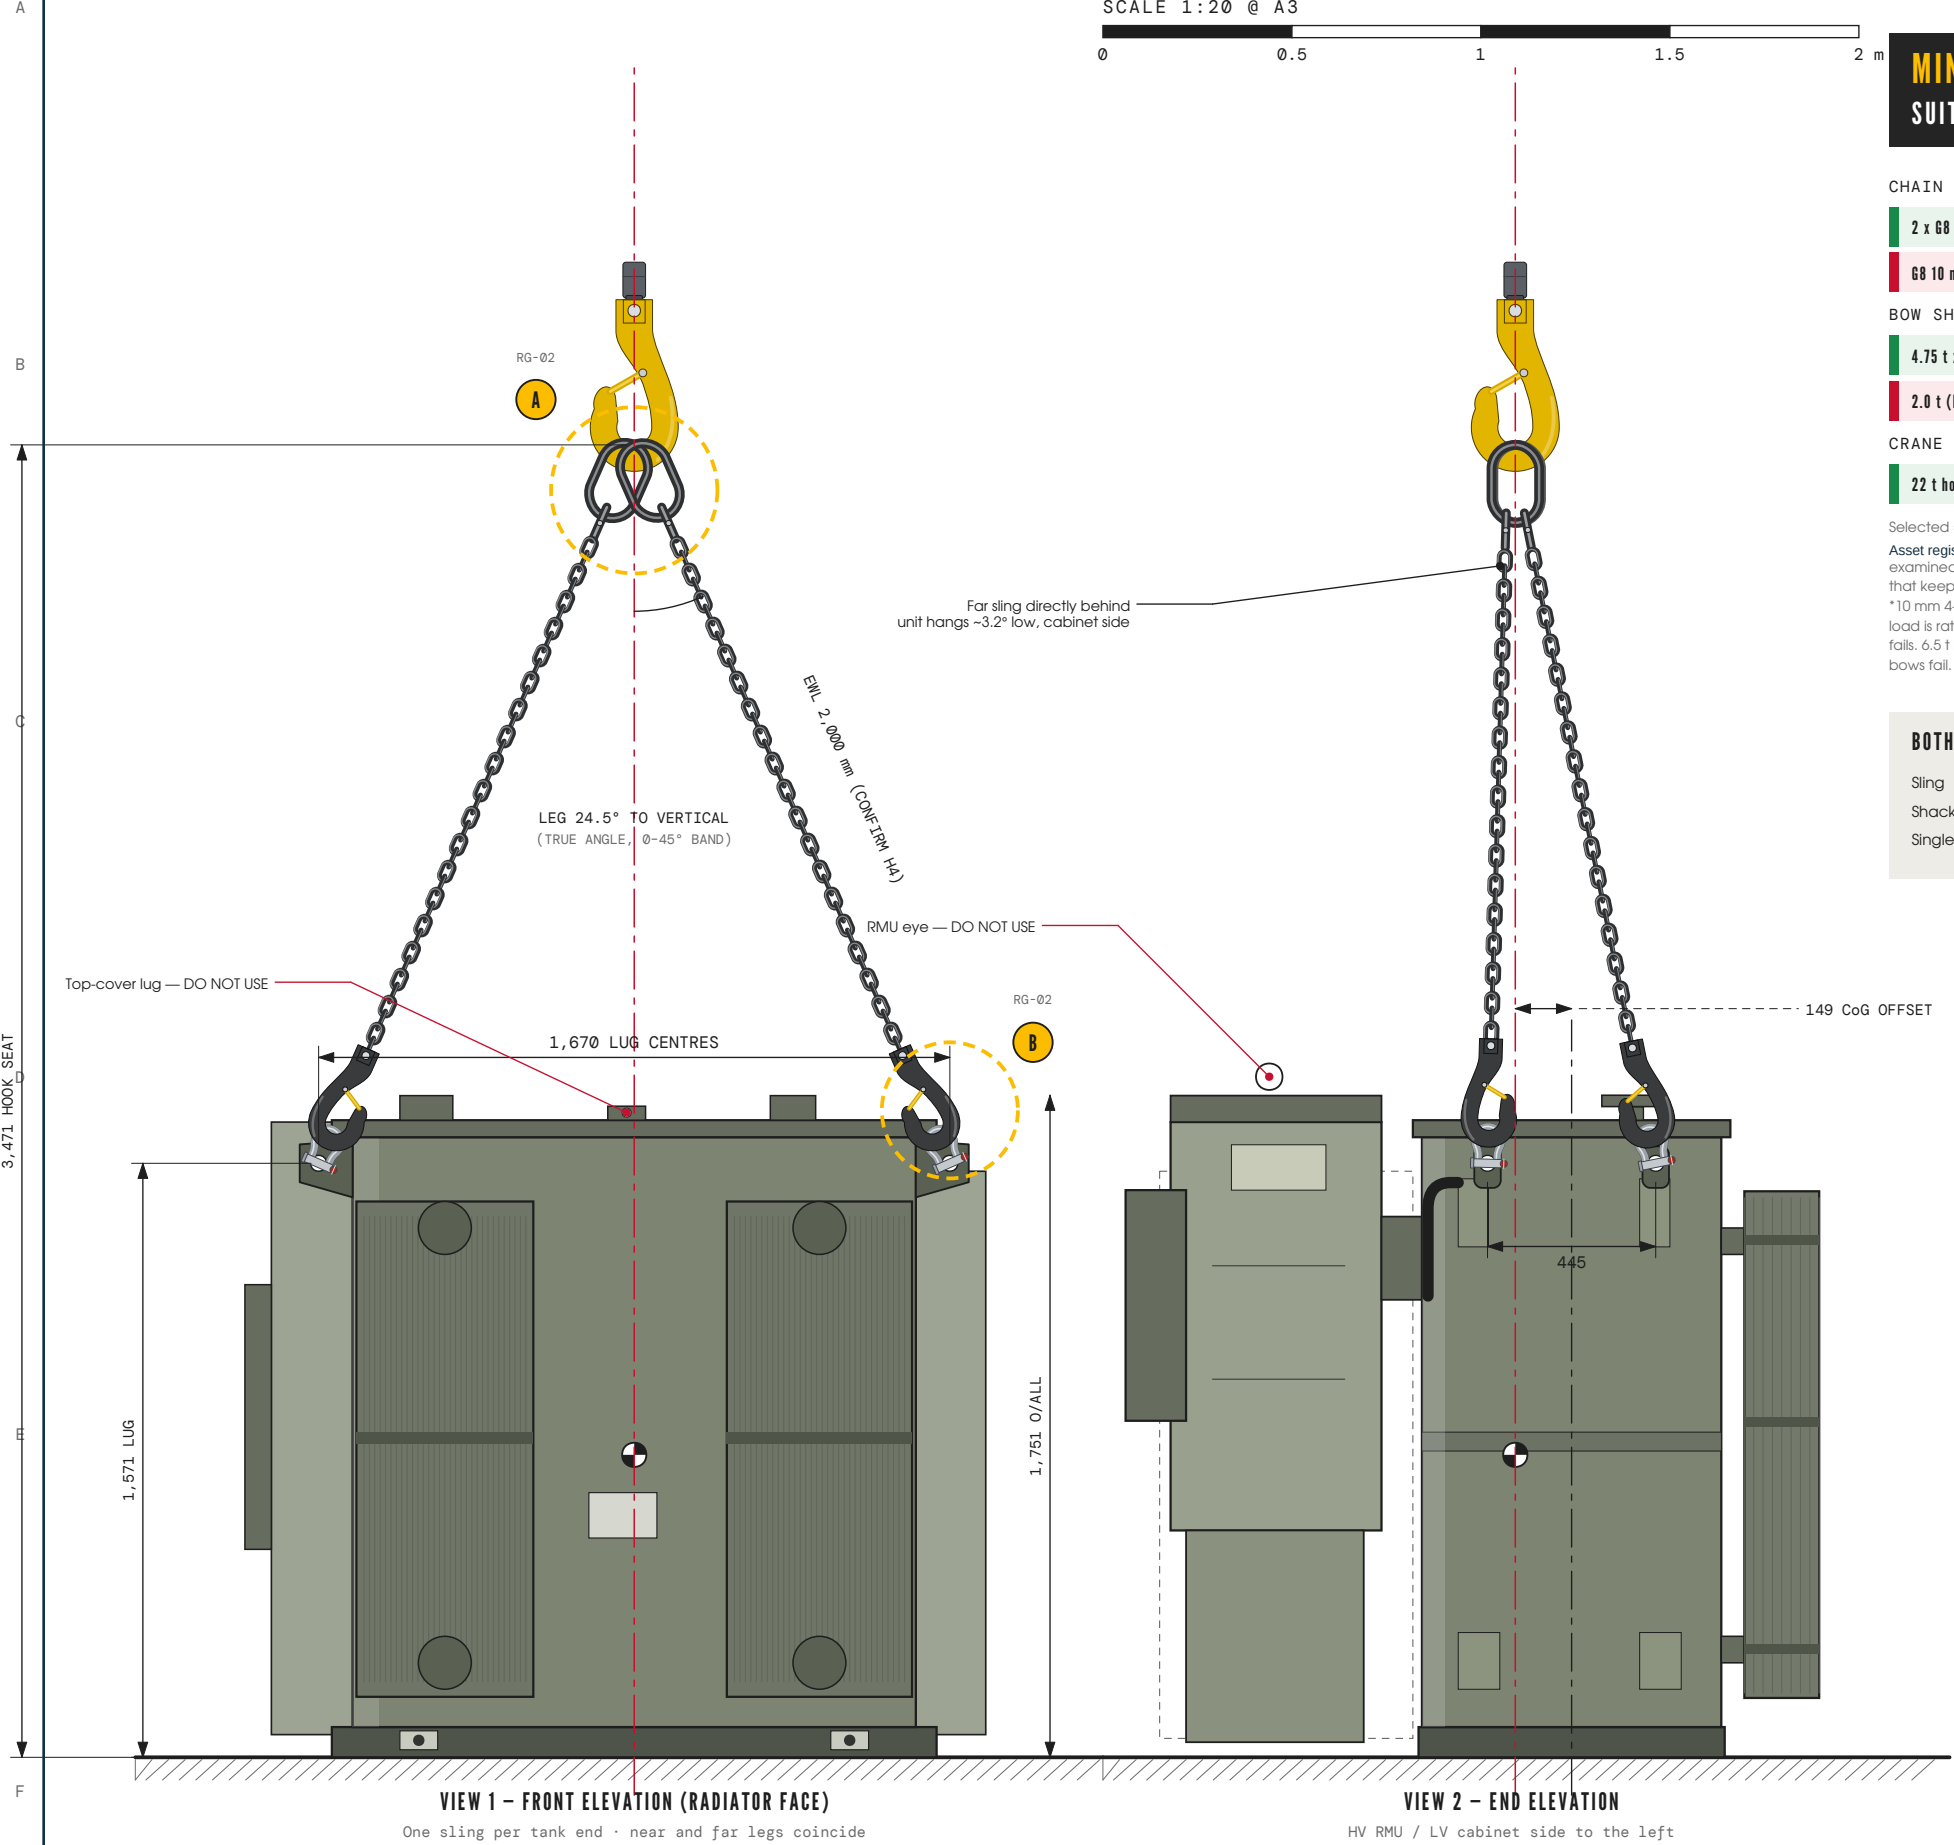

RIGGING DETAILS

CERTIFIED TACKLE AT PUBLISHED DIMENSIONS · DETAIL A 1:10 · DETAIL B 1:5

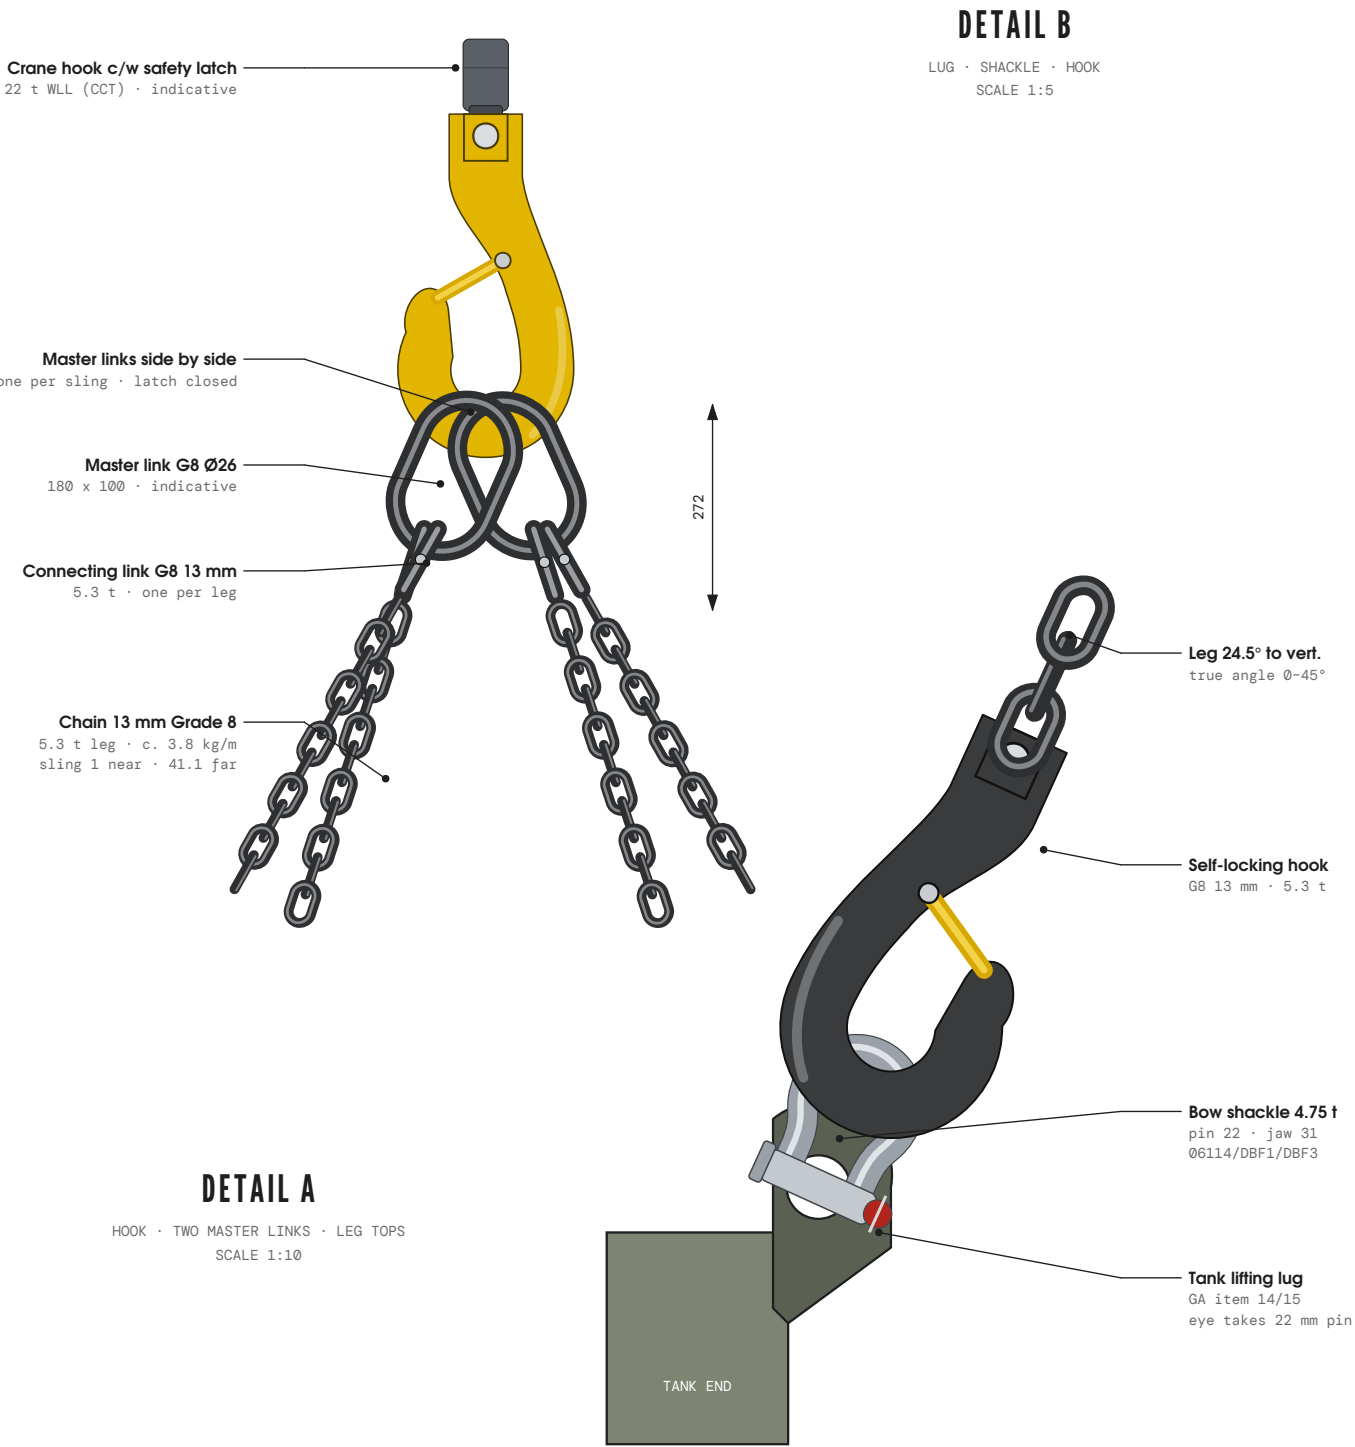

WHY THIS IS THE MINIMUM SIZE SUITABLE

Load hung on the slings (L1, governing): 4,933.5 kg (manufacturer declared + LV allowance, +10% tolerance) + shackles and tag lines = 4,942 kg.

The transformer is a rigid load on four lugs and its CoG is offset toward the cabinets, so the pair of two-leg slings is rated as ONE two-leg sling: any two legs may take the whole load.

The specified 13 mm Grade 8 two-leg slings (1. 41.1): 7,500 kg · 65.9% (L1), 63.0% (L2). The only smaller chain sling held, the 10 mm 4-leg (42106, 6.7 t), is 4,250 kg as two-leg — 116.3%: not suitable.

Worst leg =  $4,942 / (2 \times \cos 24.5^\circ) = 2,715$  kg. Bow shackle 4.75 t — 57.2%. The next smaller held, 2 t (D3), is 135.7% — not suitable; only three 6.5 t are held, too few for four lugs.

No component may be replaced by a smaller one on the day. A larger certified item is acceptable only if it fits the lug eye and the hook seat, and the AP is told.

| ITEM                            | ASSET           | ID | QTY | WLL        | kg     |
|---------------------------------|-----------------|----|-----|------------|--------|
| Crane hook (in rated capacity)  | Fassi / CCT     |    | 1   | 22 t       | incl.  |
| Two-leg chain sling G8 13 mm    | 1               |    | 1   | 7.5 t      | 22.0   |
| Two-leg chain sling G8 13 mm    | 41.1            |    | 1   | 7.5 t      | 22.0   |
| Alloy bow shackle 4.75 t        | Ø6114/DBF1/DBF3 |    | 4   | 4.75 t     | 4.72   |
| Tag lines, non-conductive 10 m  | —               |    | 2   | —          | 4.00   |
| Pair rated as ONE two-leg sling |                 |    |     | rigid load | 7.5 t* |
| Allowance used in the plan      |                 |    |     |            | 55.00  |

\* any two legs may carry the whole load. Sling masses estimated (13 mm G8 chain c. 3.8 kg/m + master, links, hooks); shackle 1.18 kg (Green Pin). The 55 kg allowance covers them.



TYPICAL TWO-LEG CHAIN SLING

Illustrative product image (Adobe Stock 647136006, licensed to RMT). The specified slings are 13 mm Grade 8 two-leg, 7.5 t, with clevis self-locking hooks. Two are used, one per tank end, both master links on the crane hook. Colours vary by maker.

SLING TAGS — CHECK BEFORE USE

Grade 8 · 13 mm · 2-leg  
2-leg 7.5 t @ 0~45° · leg 5.3 t  
IDs 1 and 41.1 match the  
inspection report of 09/06/2026  
Exam 01/05/2026 · due 01/11/2026  
EWL read and recorded (H4)  
Both slings the same EWL

PRE-USE CHECKS (SLINGER / SIGNALLER)

- ☐ Tags legible: G8 13 mm 2-leg 7.5 t, IDs 1 and 41.1; exam in date (due 01/11/2026).
- ☐ No stretched, twisted, nicked or gouged links; no weld spatter or heat colour.
- ☐ Hooks: latches spring closed and lock; no throat opening; clevis pins secure.
- ☐ Shackles: 4.75 t stamped; pin nut + split pin, or screwed home and moused.
- ☐ Both master links seat side by side in the crane hook bowl, latch closed.
- ☐ Legs 0~45° to vertical: EWL at least 1.2 m; both slings the same EWL.



TRANSFORMER INSTALLATION

Fassi F905R.2 | Public drawing example

DRAWING

RIGGING DETAILS  
AND COMPONENT  
SCHEDULE

|                       |                                  |
|-----------------------|----------------------------------|
| CHAIN                 | Grade 8 · 13 mm (specified gear) |
| SINGLE LEG WLL        | 5,300 kg                         |
| 2-LEG RATING (USED)   | 7,500 kg @ 0~45°                 |
| SLING IDS             | 1 and 41.1                       |
| SHACKLE               | Alloy bow 4.75 t · 4 No.         |
| SLING SELF-WEIGHT     | c. 22 kg each (est.)             |
| GROSS BELOW HOOK (L1) | 4,986 kg                         |
| THOROUGH EXAM.        | 01/05/2026 · due 01/11/2026      |

NOTES

- Gear is drawn at the published dimensions for its class (EN 818 Grade 8 13 mm; Green Pin G-4163 4.75 t). The register does not name the maker: read the tags on the day. The crane hook is indicative.
- Two separate two-leg slings, one per tank end. Do not mix Grade 10 or unmarked components into either sling.
- Six-monthly thorough examination expires 01/11/2026 (LOLER reg 9). Lifting after that date needs the new inspection report (hold point H1).
- Register IDs DBF1 (x2), D3 (x4) and BB1 (x2) are duplicated, and ID 1 is both sling and 8.5 t shackle: check each item by its tag or stamped WLL and the report line.
- Reject and quarantine any component with a missing tag, stretch, nick, gouge, bent hook, damaged latch or heat discoloration.

RMT SOLUTIONS LTD

Ricky Marsh | CPCS A61 Appointed Person

07803 808093

ricky@rmtsolutions.co.uk

www.rmtsafetytsolutions.com

EXAMPLE ONLY - NOT FOR USE ON SITE

PUBLIC COPY | RG-02 | 6 October 2026