


EL-01 · UNLOADING AT DB-1, TRAVEL AND STACKING – ELEVATIONS TO SCALE

JCB 540-140 HiViz drawn to its published static dimensions; trailer to a typical 13.6 m flatbed (deck 1.50 m). Reach is measured from the front face of the front tyres, as JCB's chart.

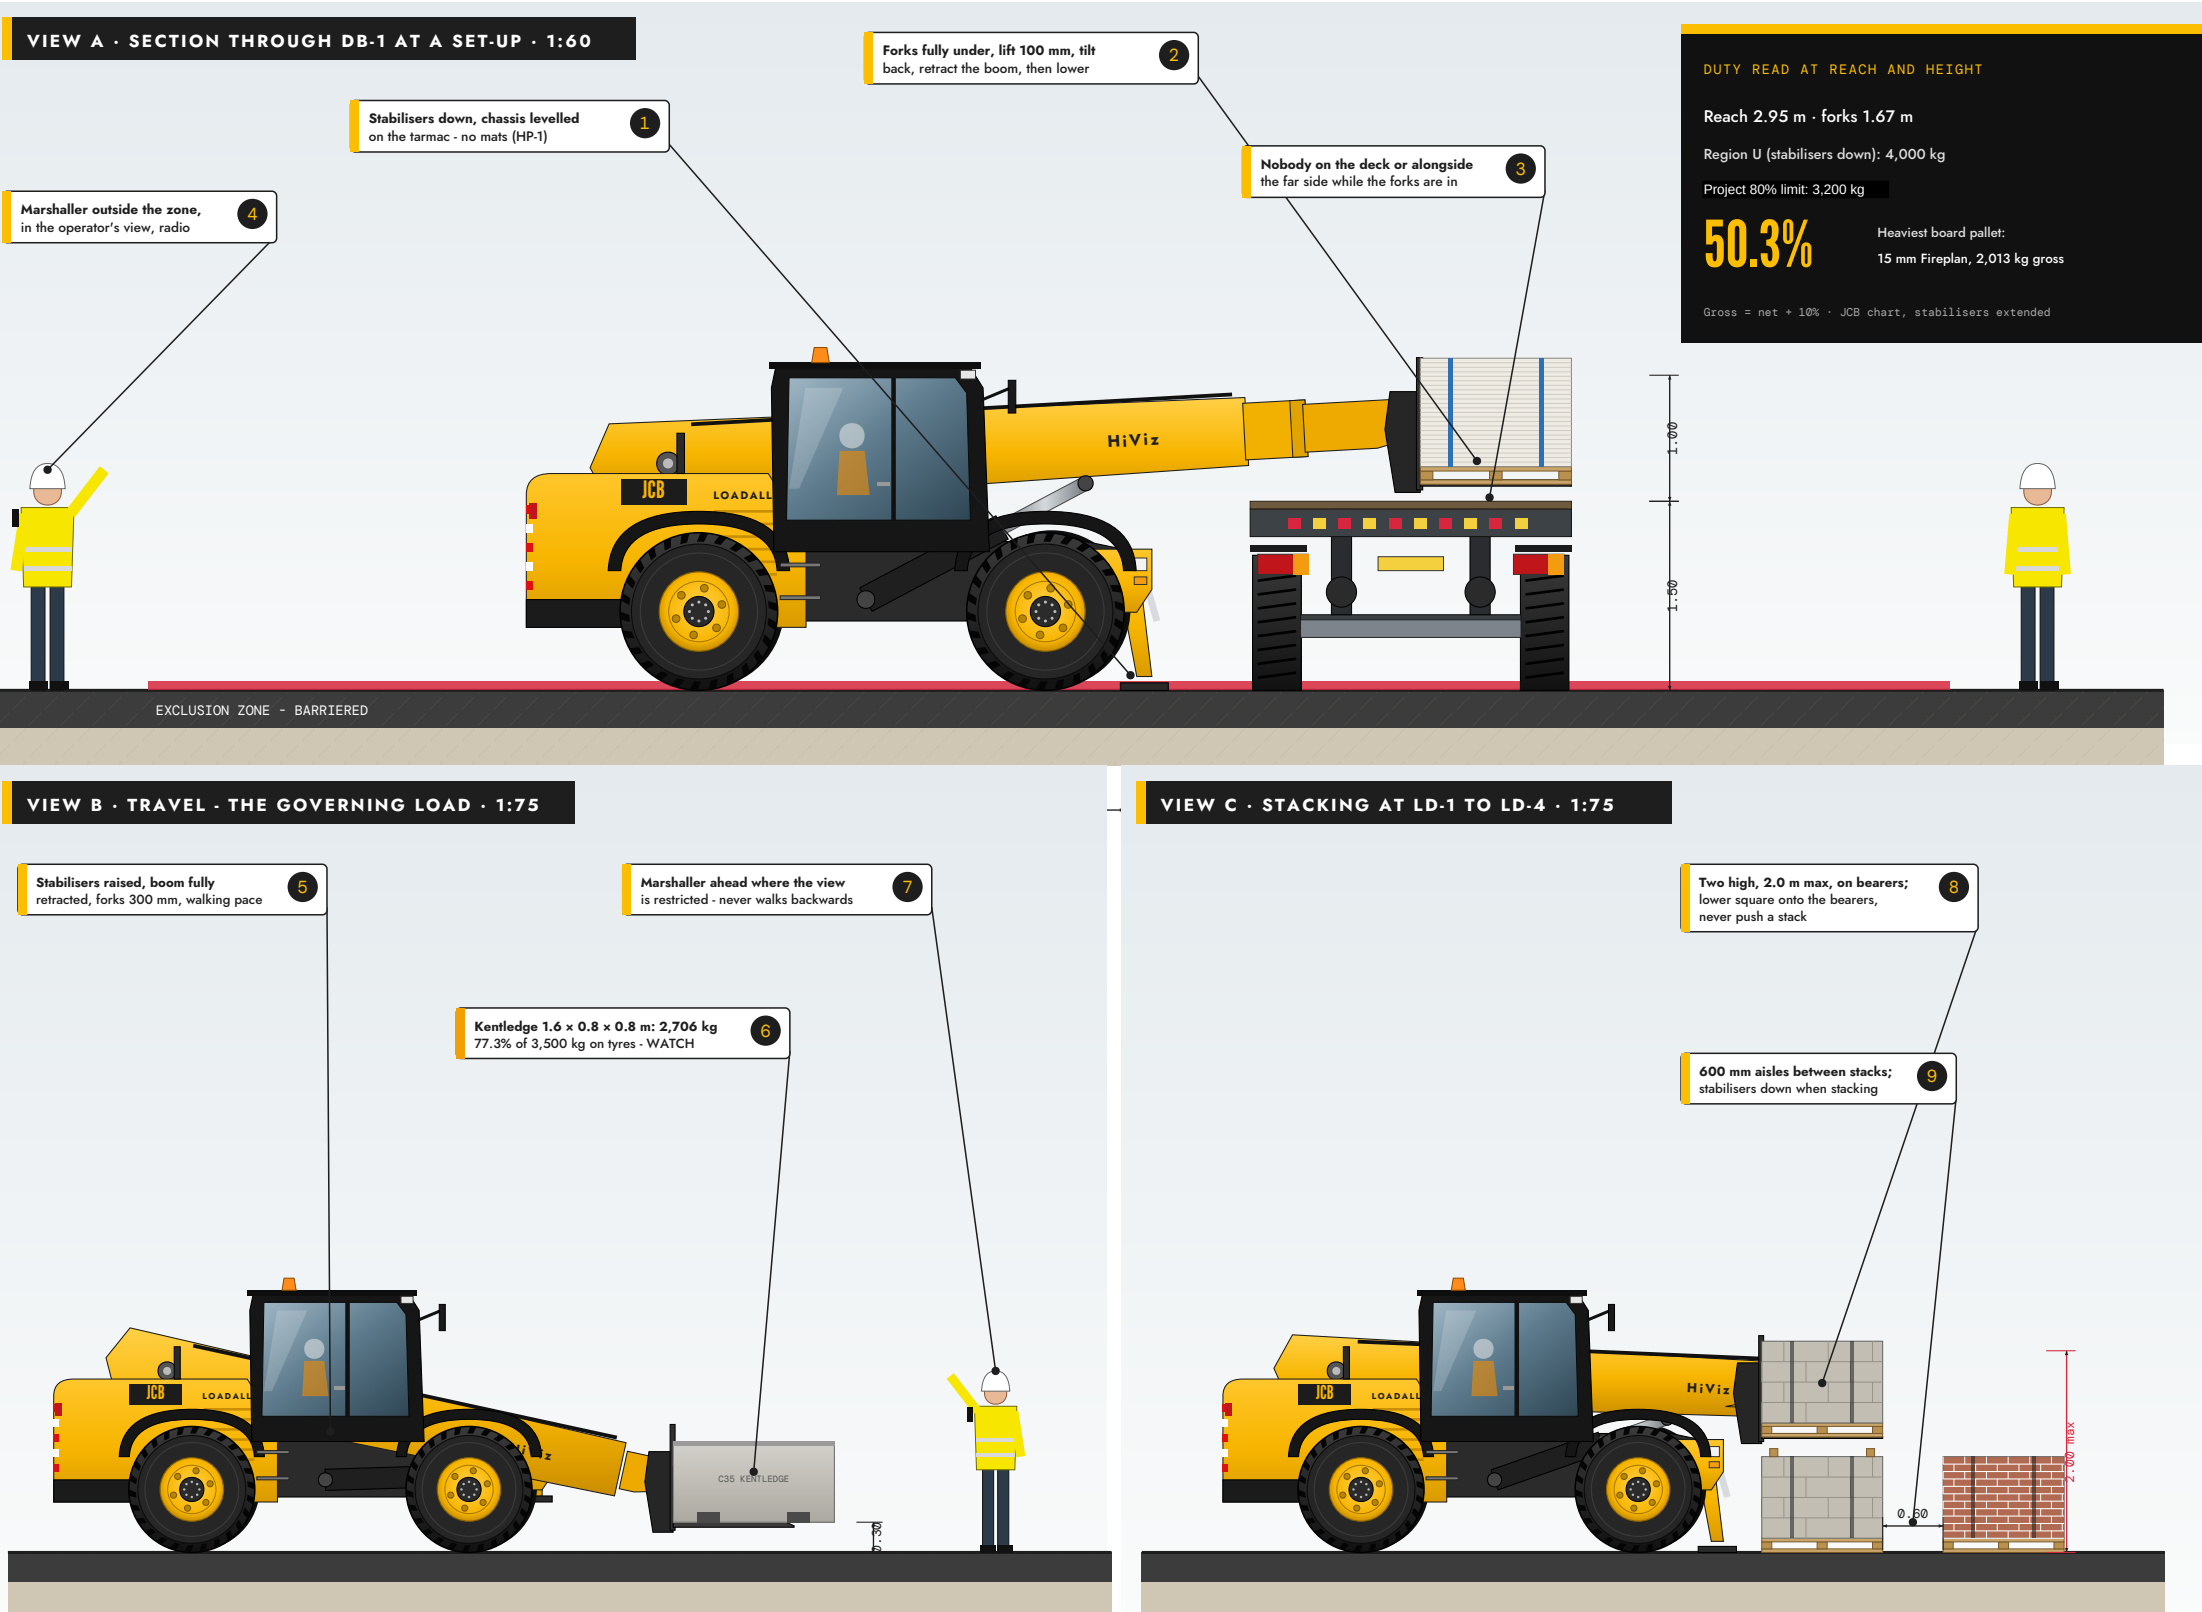

DUTY CHECK - HEAVIEST 14			
Load (heaviest first)	Gross	U	T
Kentledge block 1,600 x 800	2,706	68%	77%
Forklift tipping skip 1.0 m³	2,046	51%	58%
15 mm Fireplan board 2.4 x 1.2	2,013	50%	58%
12.5 mm standard wallboard 2.4	1,971	49%	56%
15 mm Soundshield 2.4 x 1.2	1,965	49%	56%
12.5 mm Soundshield 2.4 x 1.2	1,921	48%	55%
19 mm Coreboard 3.0 x 0.6	1,921	48%	55%
Scaffold fittings bin	1,705	43%	49%
Facing brick pack (max 500)	1,678	42%	48%
15 mm standard wallboard 2.4	1,552	39%	44%
RCM Y board (external) 2.4	1,514	38%	43%
Pack of block - dense	1,513	38%	43%
Plywood / OSB 2.44 x 1.22	1,485	37%	42%
Structural timber pack - 6.0 m	1,408	35%	40%

U = unload / stack, stabilisers down (4,000 kg)

T = travel on tyres (3,500 kg) · ceiling 80%

- RULES ON THE DAY
1.

Stabilisers down for every lift from or to a vehicle, stack, rack or scaffold. On tyres only to travel.
2.

Tilt back before moving; never travel with the boom raised or extended.
3.

No load over anyone. Nobody on a deck, a load or the forks.
4.


Straps released from the ground only. Loose items banded before lifting.
5.

Wind: stop at 9 m/s mean or 12 m/s gust; large-sail loads (marked in the schedule) at 7 m/s.
6.

Every gross weight in this plan includes a 10% allowance on the declared net weight.

EL-03 · UP TO THE SCAFFOLD – LOADING BAYS LB1 TO LB3 AND THE HAND-OVER TO THE HOIST

Section at 1:100 through a north-face loading bay; hotel elevation at 1:500. Floor levels are INDICATIVE (ground 4.20 m, typical 3.15 m) until the scaffold design fixes the bay decks (HP-5).

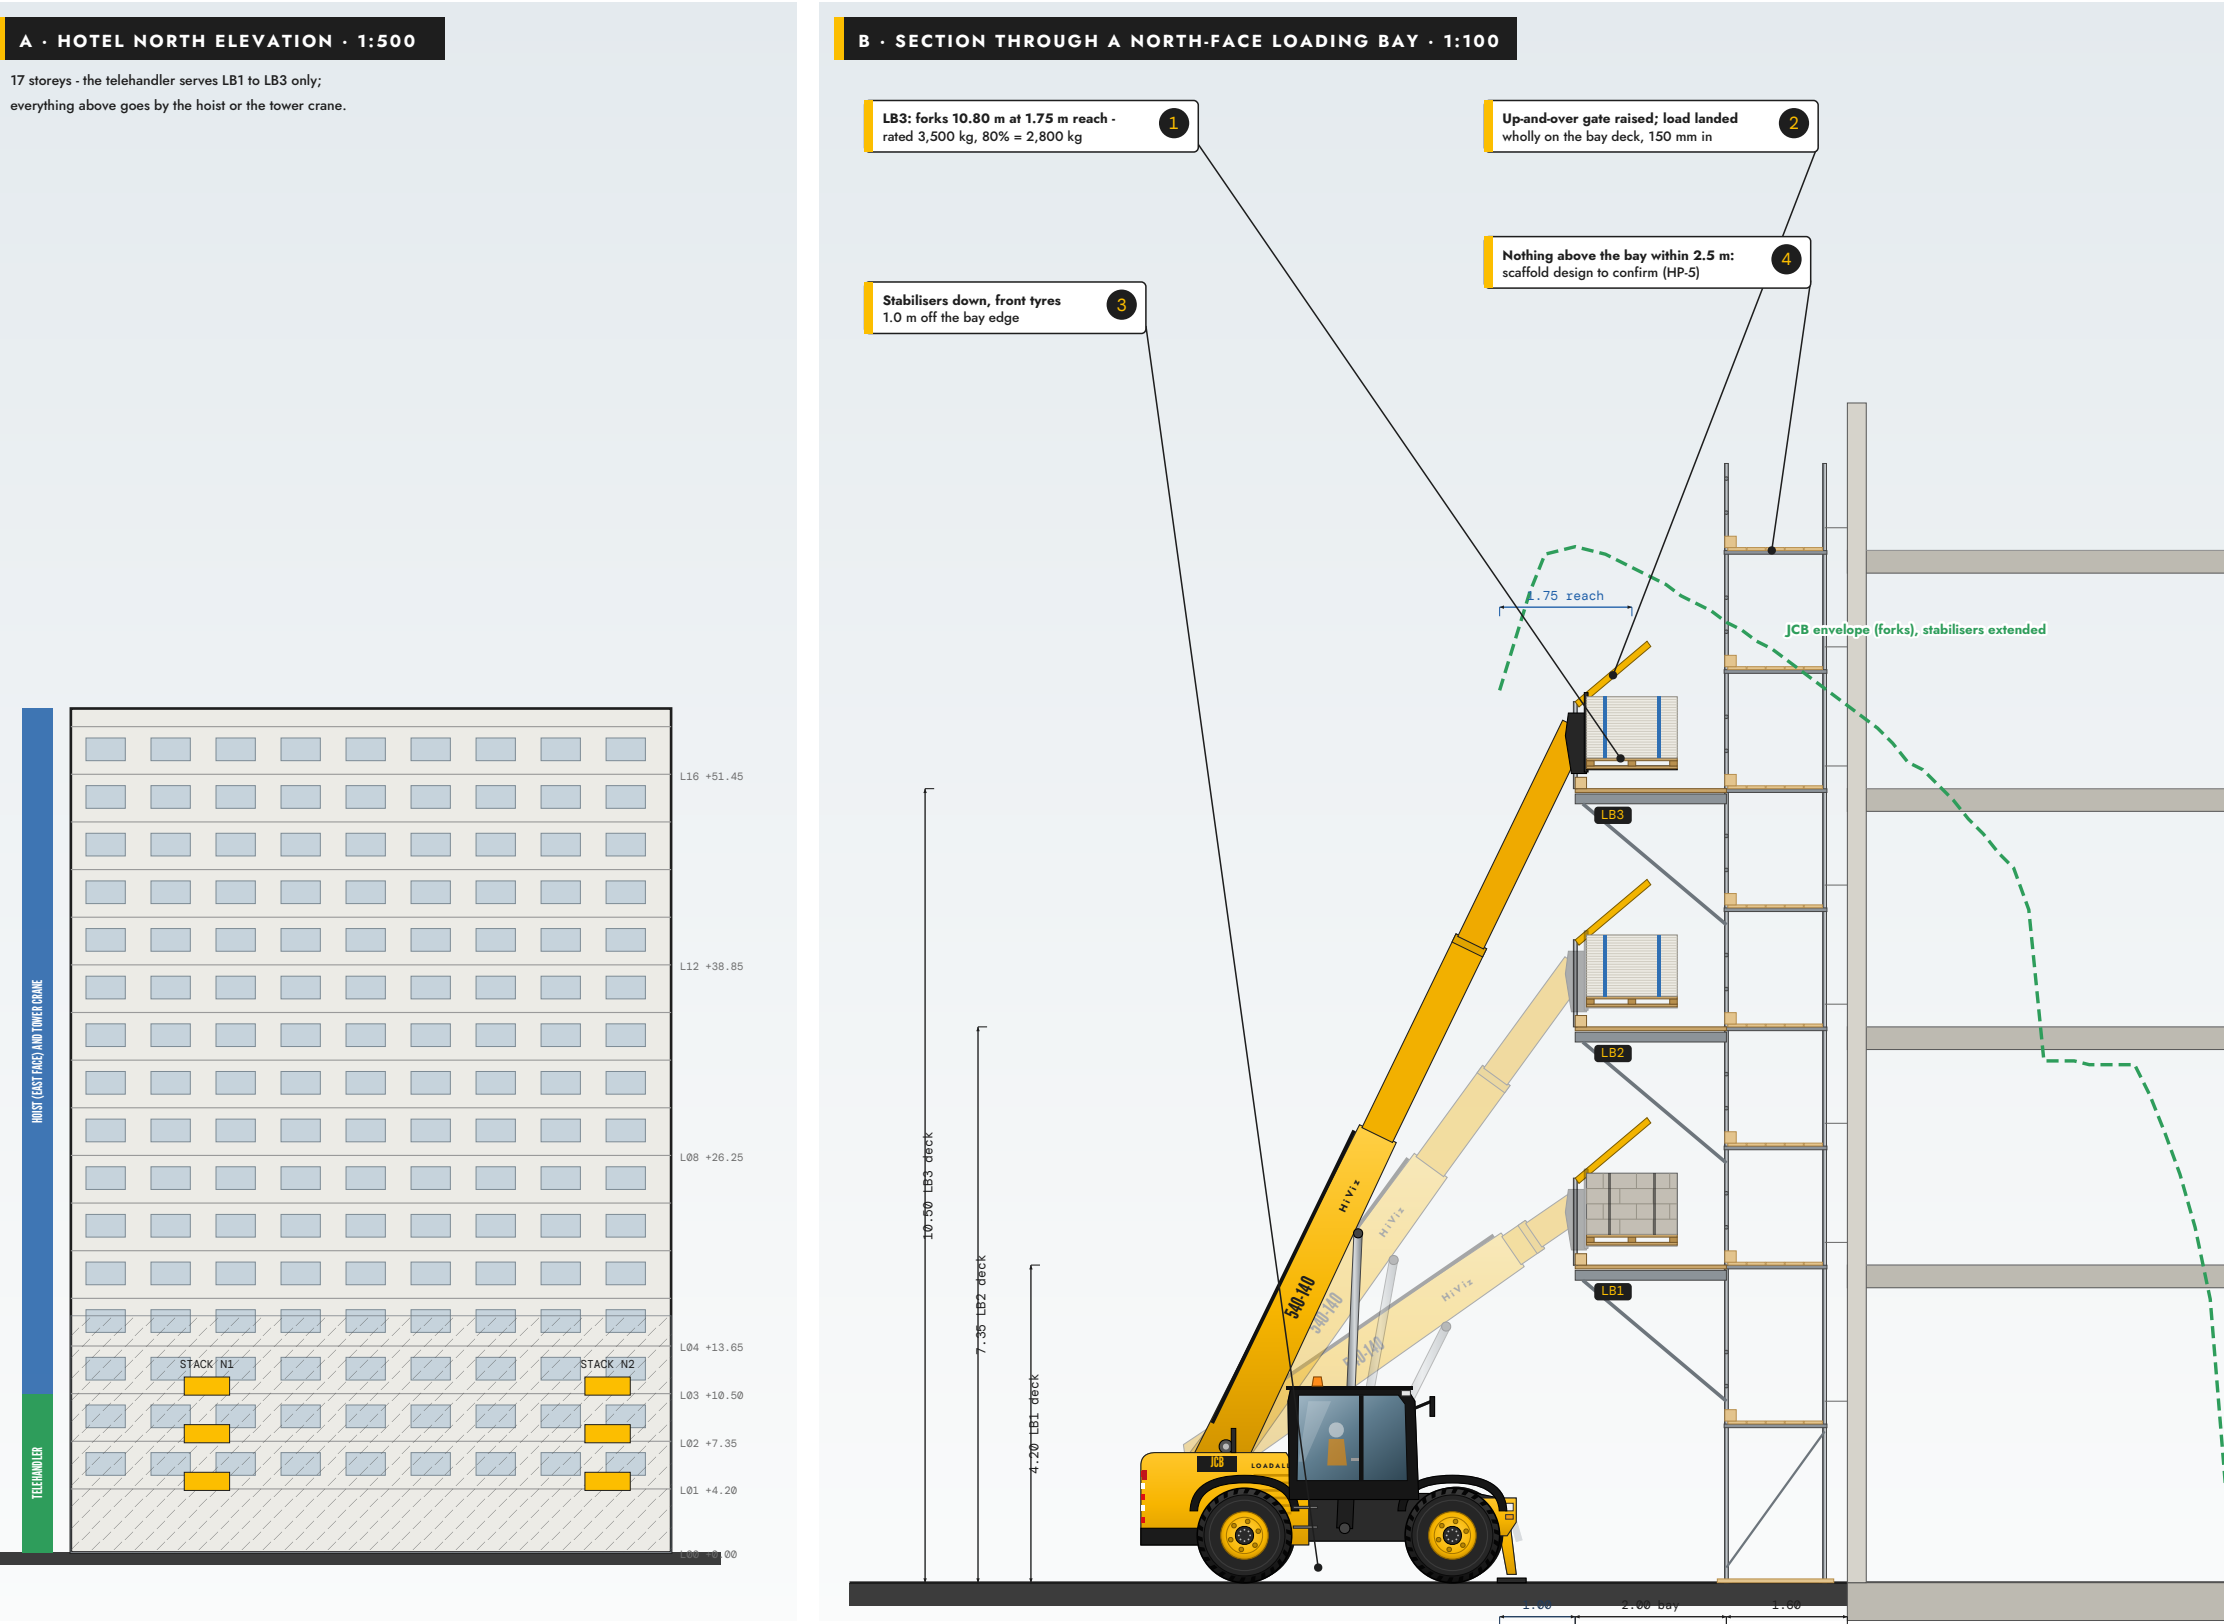

LOADING BAYS - TELEHANDLER DUTY				
Bay	Deck	Forks	Rated	80%
LB1	4.20	4.50	4,000	3,200
LB2	7.35	7.65	4,000	3,200
LB3	10.50	10.80	3,500	2,800

Highest deck: 12.70 m at 1.75 m reach (12.25 m at 2.6 m), 0.40 m clear.
L04 at about 13.65 m is out of reach - hoist / TC.



- THE BAY DECIDES, NOT THE MACHINE
- The telehandler can place every scheduled scaffold item at LB1-LB3 within the 80% limit. The limit on site is the BAY.
 - Each bay carries its design SWL on a sign and the scaffold tag. No load heavier than the bay's SWL; one pallet at a time unless the design says otherwise.
 - Bays are cantilever or independent bays with an up-and-over gate - never a working lift used as a landing.
 - The load lands wholly on the bay deck. Nothing is pushed off the forks; the forks are withdrawn level.
 - Loads longer than the bay's clear width are not taken to the scaffold - ground laydown only.
 - Above LB3, materials go by the hoist (east face) or the tower crane under their own plans.

CHECK AGAINST THE BAY DESIGN (HP-5)		
Scaffold item (highest kN/m² first)	Gross	kN/m²
Facing brick pack (max 500)	1,678	16.6
Scaffold fittings bin	1,705	13.9
Wall and floor tiles (porcelain)	1,265	12.9
Pack of block - dense	1,513	12.4
Pack of block - medium density	1,375	11.2
19 mm Coreboard 3.0 x 0.6	1,921	10.5
Bagged cement - 40 x 25 kg	1,128	9.2
Sand / aggregate bulk bag on	935	9.2
Latex levelling powder - pallet	1,100	9.0
Roof tile pallet	1,100	9.0
Emulsion paint - 40 x 15 L tubs	990	8.1
Tile adhesive / grout - 40 x 20	935	7.6

kN/m² = gross over the load's own footprint - compare with the bay's design loading. Full list: plan section 12.

EL-04 · LOADS WIDER THAN THE MACHINE, TIPPING SKIPS, KENTLEDGE AND HOOK DUTIES




Wide-load handling example: scaffold tube and timber packs carried ACROSS the forks are up to 6.4 m long against a 2.35 m machine.

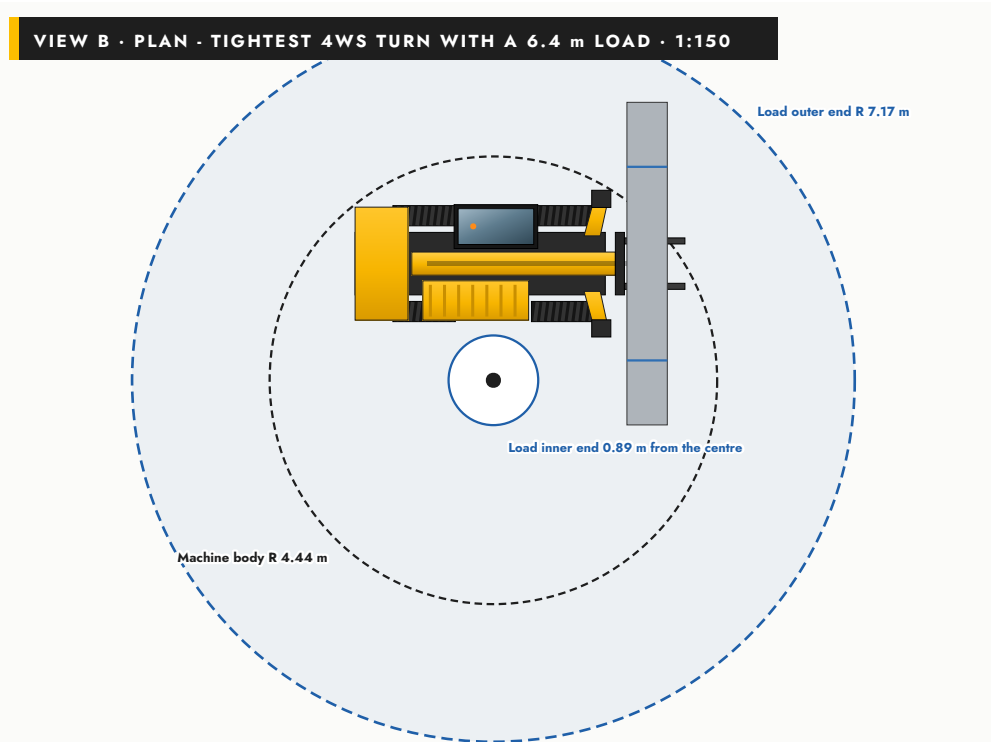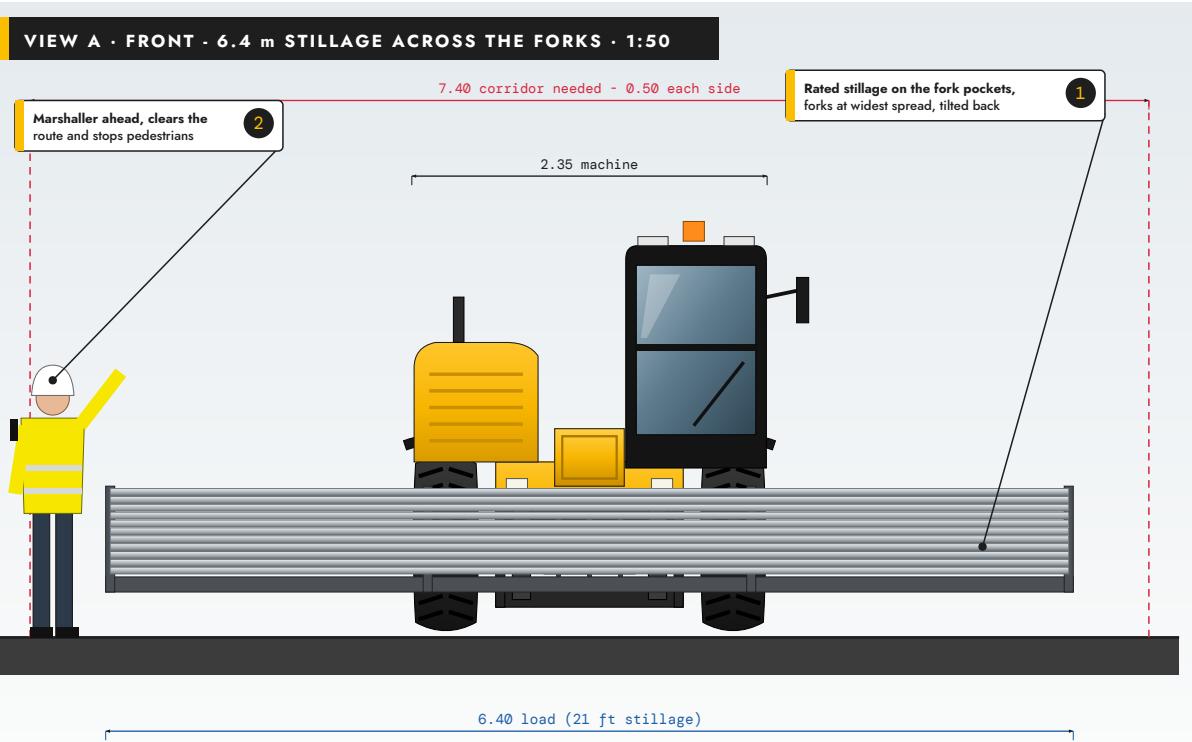

- LOADS WIDER THAN THE MACHINE**
- Carried across the forks, centred, forks at their widest spread, banded or in a rated stillage - never loose tubes or boards.
 - Straight-line travel needs the load length + 1.0 m of clear width; turning needs the radius in View B.
 - Over 5.0 m: area E, the hoist landing and the ground at the foot of stack N2 only (P1 stop line) - never into a bay. Over 3.4 m: not in the west corridor.
 - Not into a scaffold loading bay unless the bay's clear width exceeds the load by 0.30 m.
 - Large-sail loads (marked in the lift schedule) and hook duties stop at 7 m/s mean wind.


- TIPPING SKIPS**
- Only skips with fork pockets, a marked SWL and a retaining chain; filled no higher than the rim.
 - Rubble fills a 1.0 m³ skip to about 1.6 t - only a skip marked 2,000 kg SWL or more; worst case 2,046 kg gross (58.5% on tyres).
 - Released only into the waste skip at LD-4 with the tipping skip just clear of its rim (2.0 m max); nobody within the zone; the operator stays in the cab.

- HOOK DUTIES (HP-8)**
- Only the mesh bundle, power float and manhole rings, with the JCB-approved fork-mounted hook and its own chart.
 - Lift, set down within one stabilised setup. No travel with a load on the hook; no slinging over bare forks.

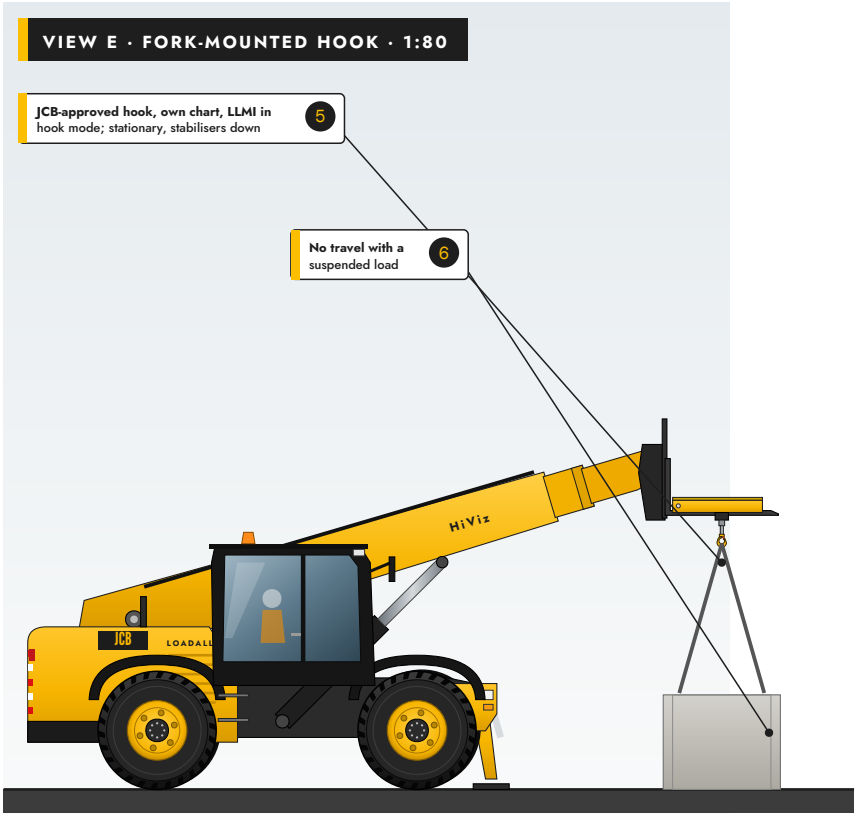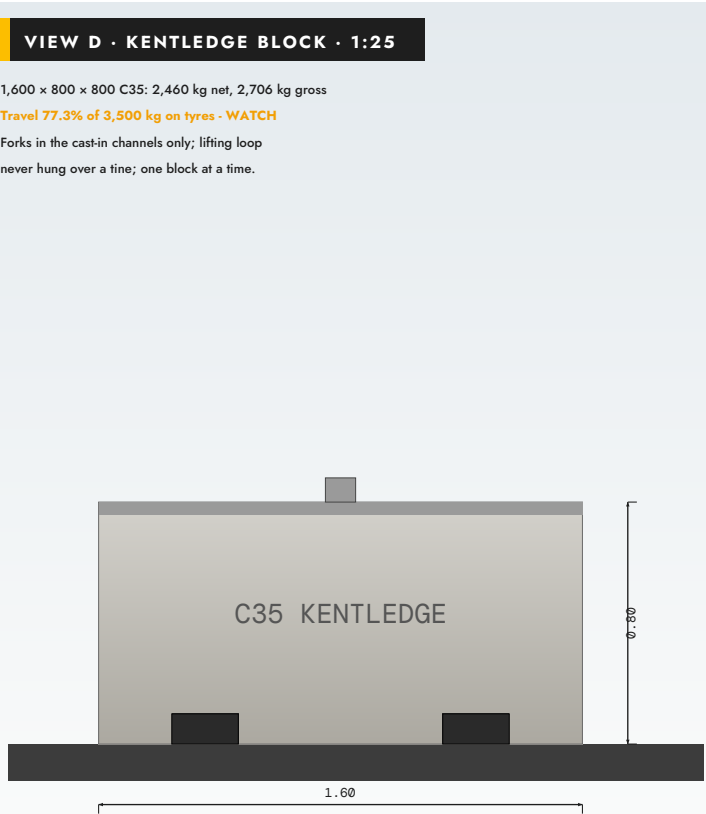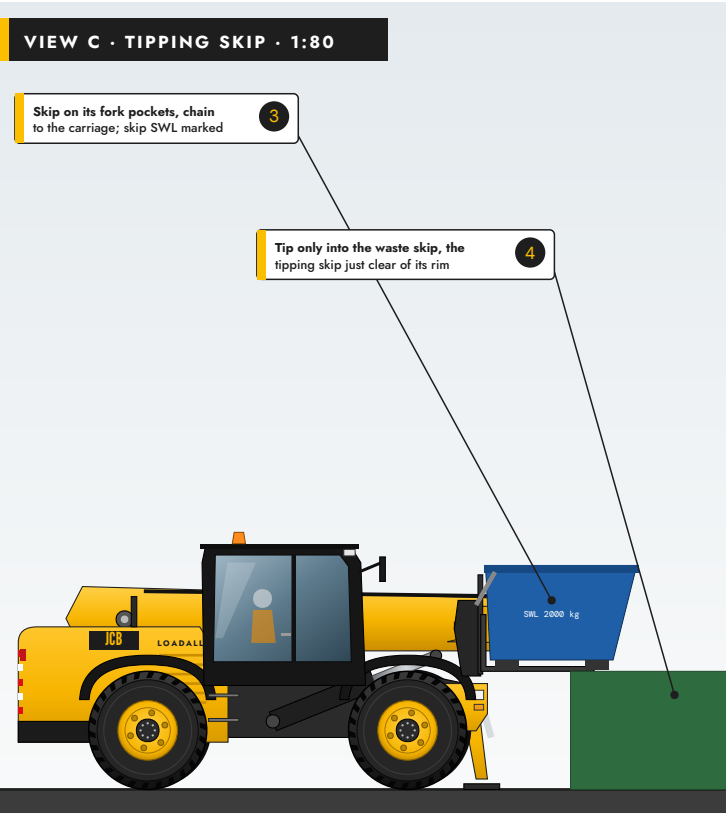

PL-02 · DELIVERY BAY DB-1 – UNLOADING SET-UPS, EXCLUSION ZONE AND LAYDOWN (AREA E)

Plan at 1:125. Vehicle drawn to scale (16.50 m articulated flatbed). Telehandler set square to the deck, stabilisers down, front tyres 1.0 m off the deck edge.

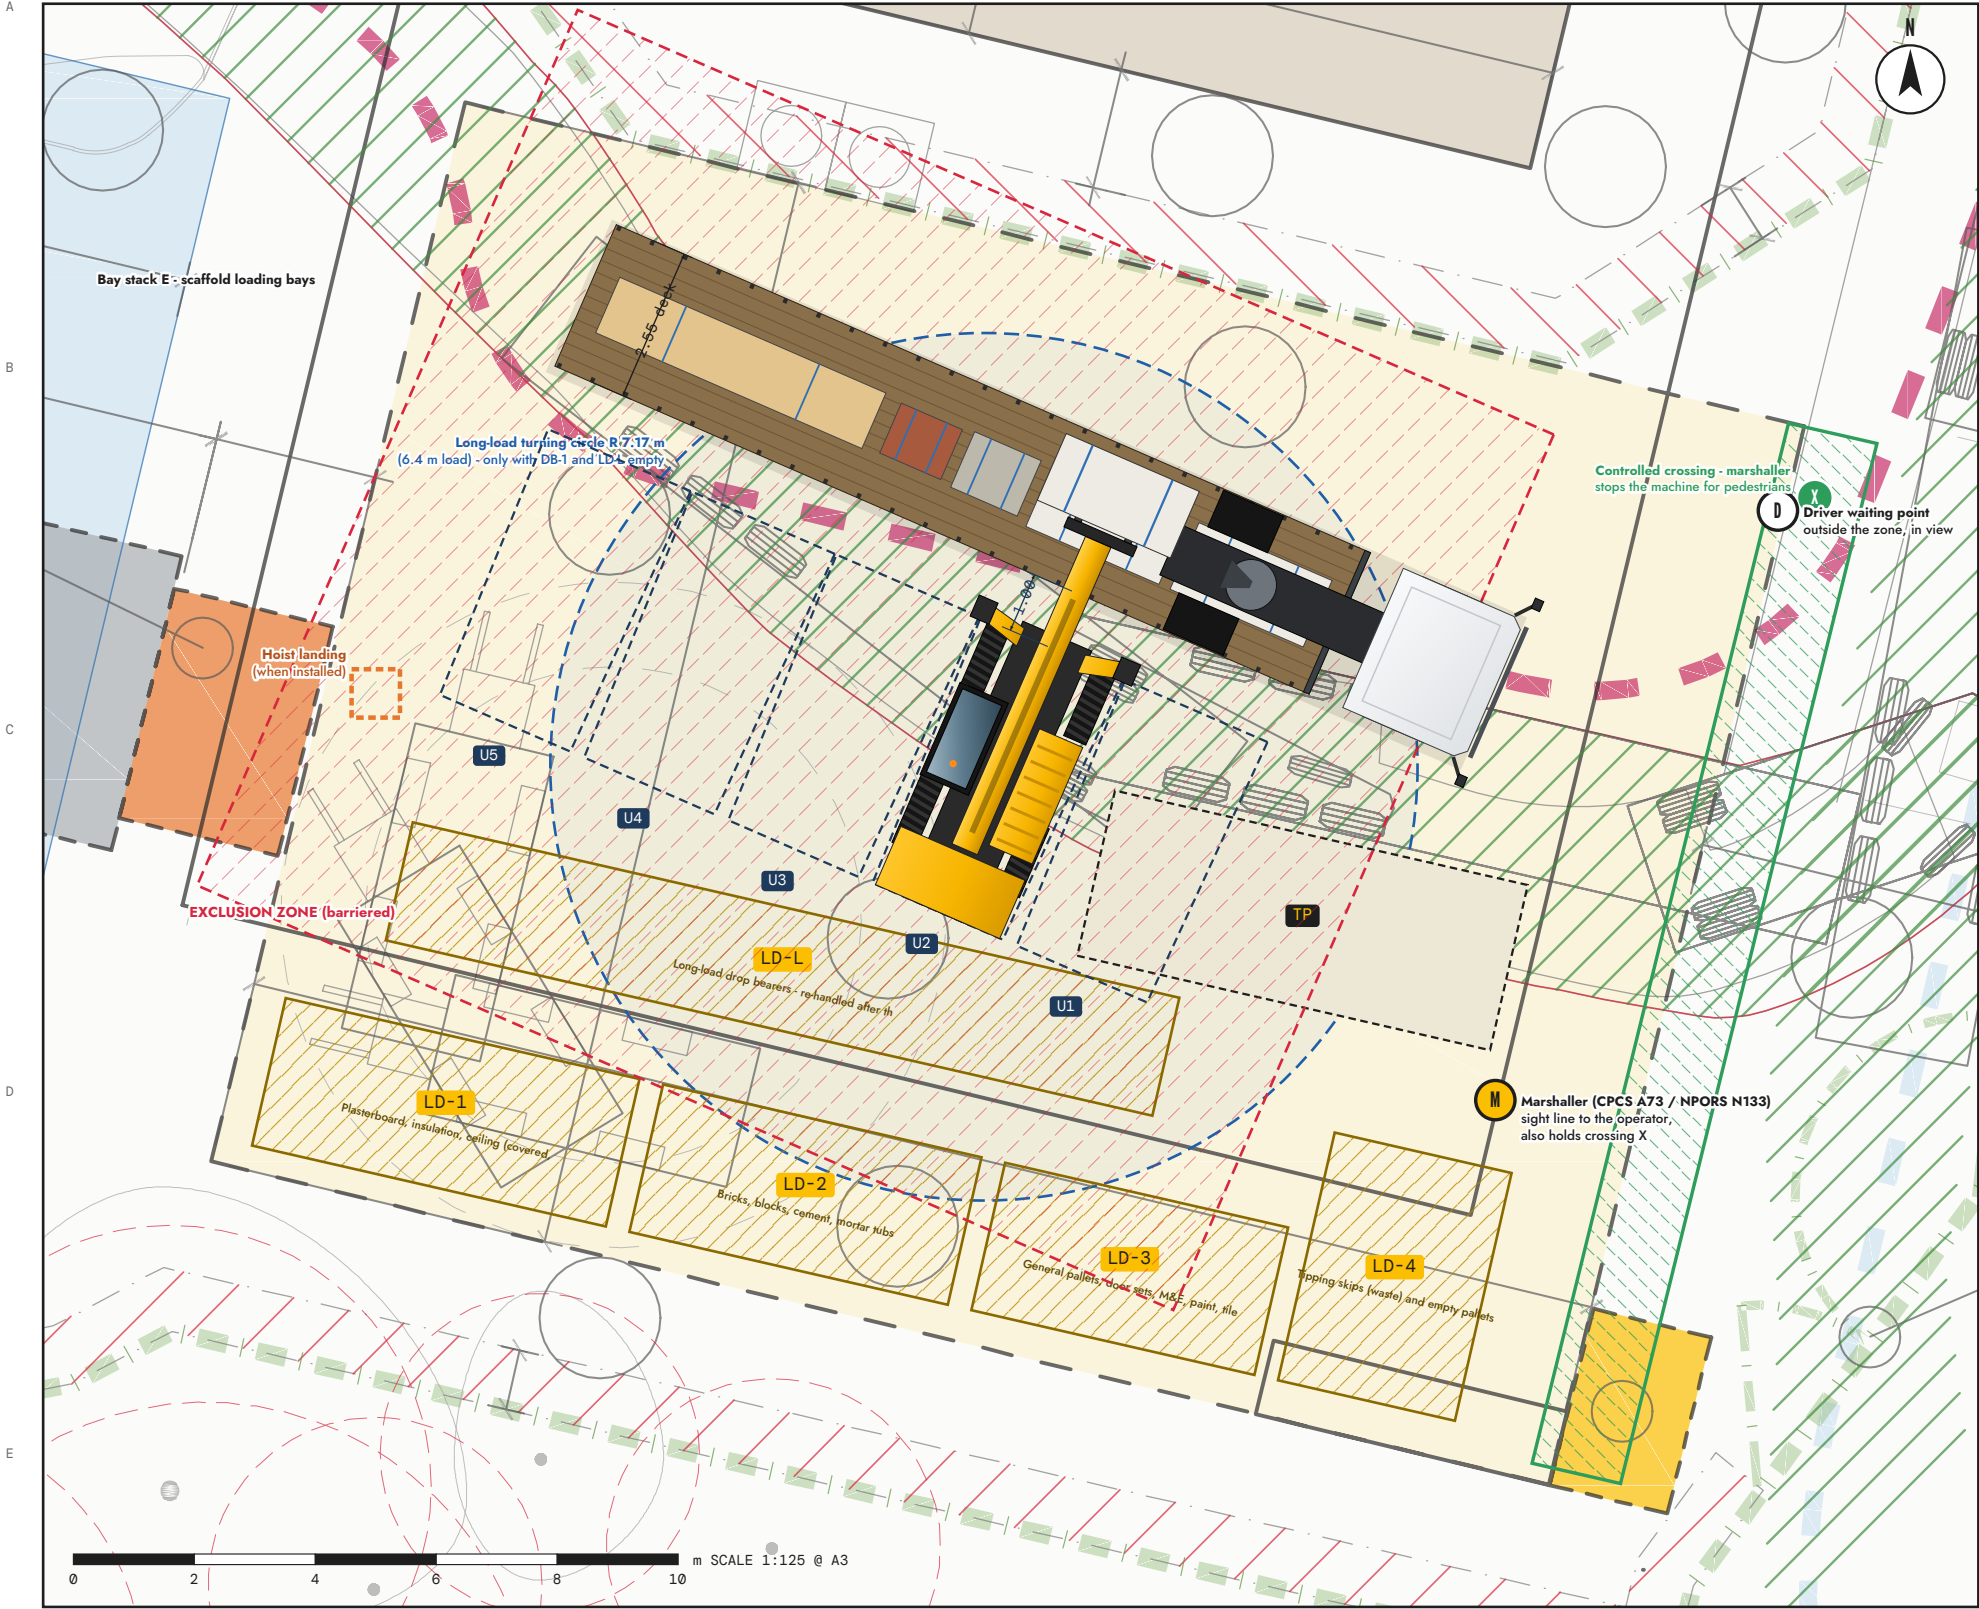

UNLOADING DUTY (STABILISERS DOWN)			
Set-up	Reach far side	Rated	80%
U1	2.95 m	4,000 kg	3,200 kg
U2	2.95 m	4,000 kg	3,200 kg
U3	2.95 m	4,000 kg	3,200 kg
U4	2.95 m	4,000 kg	3,200 kg
U5	2.95 m	4,000 kg	3,200 kg

- SEQUENCE AT DB-1**
- Vehicle enters on the DLA swept path, stops on the DB-1 marks, engine off, brake on. Driver goes to point D.
 - Marshaller closes the barriers (red zone) and holds the walkway crossing X.
 - Driver releases straps and opens curtains from the ground BEFORE the forks go in, once the load is checked for shift; then goes to point D.
 - Telehandler sets up at U1-U5, stabilisers down, chassis level, front tyres 1.0 m off the deck.
 - Forks fully under, lift 100 mm, tilt back, retract the boom to draw the load clear, lower to 300 mm, raise the stabilisers, then reverse.
 - Place in LD-1 to LD-4 or on LD-L; never over a person, never over the walkway.
 - Loads over 3.1 m across the forks are not turned while a vehicle is in DB-1 - drop on LD-L and re-handle after it leaves.
 - Barriers open for the vehicle to leave only when the telehandler is stationary and clear of the swept path.

KEY FIGURES	
Item	Value
Vehicle, artic flatbed	16.50 × 2.55 m, deck 1.50
Stand-off to deck edge	1.00 m
Load centre, far side	2.95 m
Fork height to lift	1.50 deck + 0.07 + 0.10 = 1.67 m
Longload turn radius	7.17 m (6.4 m load)
Area E (DLA)	about 24.0 × 17.7 m
Exclusion zone	far side + 3.0, ends + 2.0, machine + 3.0 m



UNLOADING AND LAYDOWN PLAN

JCB 540-140 Hi-Viz | Public drawing example

EXAMPLE ONLY - NOT FOR USE ON SITE

Drawing PL-02 | Public copy | 6 October 2026

Ricky Marsh | CPCS A61 Appointed Person

07803 808093

ricky@rmtsolutions.co.uk

RMT Solutions Ltd